LIBRARY OF CONGRESS
COPYRIGHT DEPOSIT

THE AMERICAN GAS-LIGHT JOURNAL AND CHEMICAL REPERTORY

Publishing Office, No. 42 Pine Street.

Devoted to the Interests of Illumination, Heating, Ventilation and Sanitary Improvement, Domestic Economy, and General Science.

VOLUME XIX.—No. 6. Whole No. 342. | NEW YORK, TUESDAY, SEPTEMBER 16, 1873. | $3 PER ANNUM IN ADVANCE.

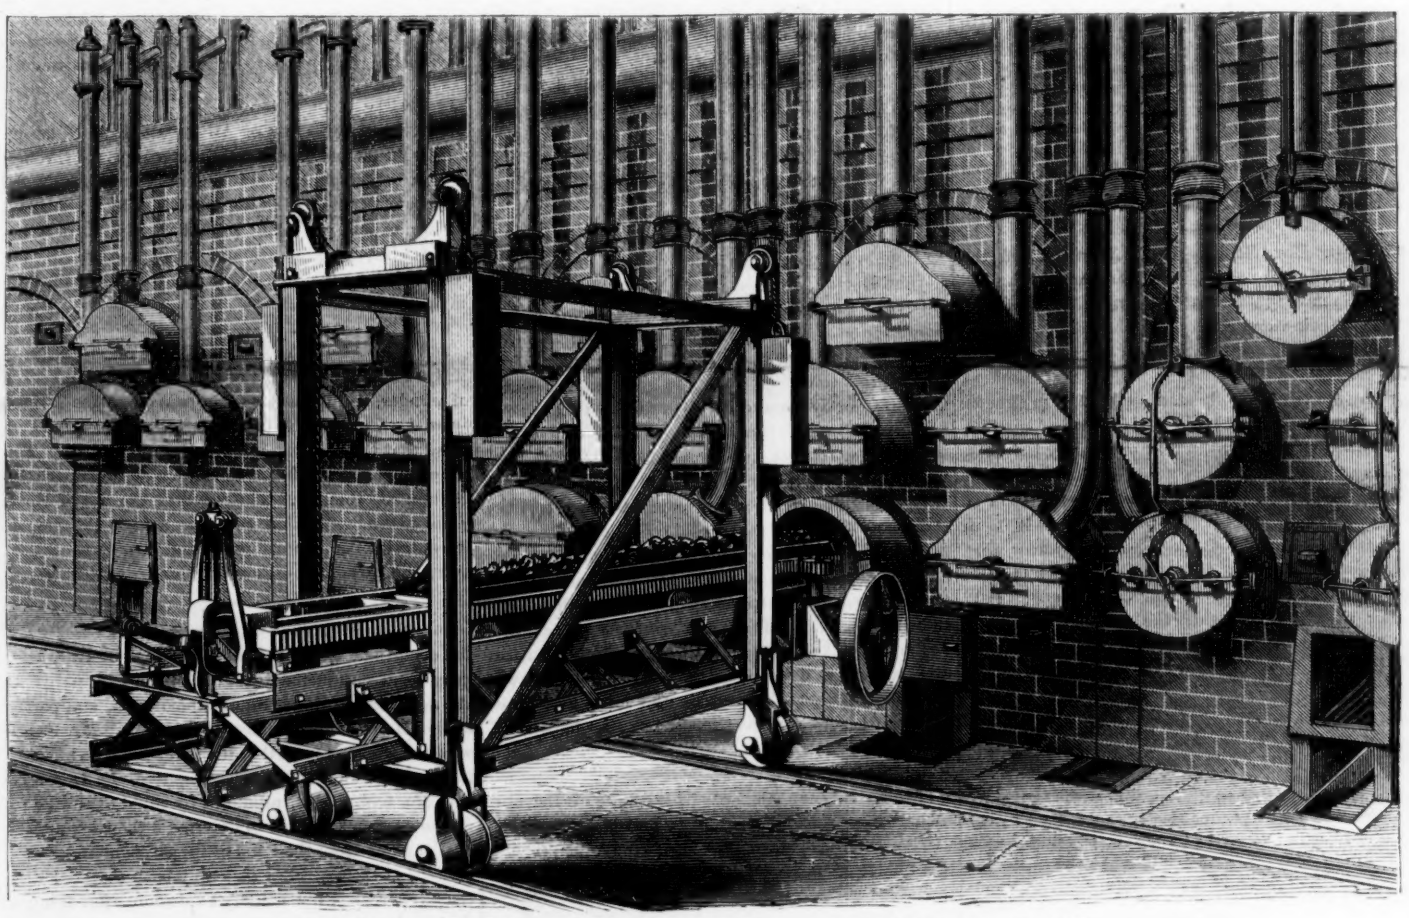

Stoking by Machinery—ALONZO F. HAVENS'S INVENTION—See Editorial page (102).

Velocity of Light.

Recently, M. Fzeau has communicated to *Les Mondes* the results of a series of very eloborate experiments made with a view to the most accurate determination of the velocity of light. The distance between the two stations of observation as found by triangulation, was 33,829.1 feet (about six miles), with a probable error of 0.001. The source of the ray was a jet of oxyhydric gas. Six hundred and fifty satisfactory observations were made, the mean of which gave 185,368 miles per second as the required velocity. The experiments of M. Foucalt to determine this same velocity give us a result of 185,177 miles.

The formerly accepted determination of the velocity of light was that of Olaf Roemer, a Danish astronomer, who deduced it from observations on Jupiter's satellites. The earth's orbit being concentric with that of Jupiter, and interior to it, the distance of these bodies is continually varying, the variation extending from the sun to the difference of the radii of the two orbits, making the excess of the greatest over the least distance equal to the diameter of the earth's orbit. A comparison of the eclipses of Jupiter's satellites during many successive years, showed that those which took place about opposition were observed earlier, and those about conjunction later than an average or mean time of occurrence. Connecting the observed acceleration in the one case, and retardation in the other, with the variation of Jupiter's distance distance below and above its average value, the difference was fully and accurately accounted for by allowing 17m, 26s. 7 for light to traverse the diameter of the earth's orbit. From these data Roemer found the velocity of light to be about 192,000 miles per second.

It seems at first sight as if the recent and very accurate determination of M. Fileau had demonstrated a defect in the earlier method, indicating, perhaps, some cause, connected with the acceleration and retardation of the apparent occultations of Jupiter's satellites, other than the time required for light to traverse the earth's orbit. But Capt. C. W. Raymond, U. S. Engineers, at present Assistant Professor of Physics at West Point, calls attention to the curious fact that by substituting in Roemer's calculation a more modern and more accurate value of the diameter of the earth's orbit, the resultant measure of the velocity of light becomes 185,344 miles per second as the velocity. This is one of the questions which will be affected by the thorough observations to be made by trained astronomers of all nations, of the next transit of Venus. The diameter of the earth's orbit, which may be called our astronomical unit of distance, will be probably finally determined by those observations. —*Engineering and Mining Journal.*

Chemical Repertory.

No. 99.—September 16, 1873.

EDITOR—HENRY WURTZ.

CHEMICAL EXCERPTS.

850. News from Illinois, via England.—Springfield, Ill., has a model rail mill, owned and operated by a stock company. This company has lately put up a gas-producing house, containing 16 gas-producers, supplying four Siemens regenerating gas heating and two puddling furnaces, with gas made almost entirely from slack (coal), which is obtained from a large pit close to the mill. The coke from these furnaces is used with about 50 per cent. of new fuel, for the production of steam, used in running the machinery, and for an increased supply of steam. They are building an additional battery of boilers, which, when finished, will give them twenty boilers. Besides the Siemens furnaces mentioned, they have one new heating, and six ordinary puddling furnaces. The capacity of the gas heating furnaces is twenty-four tons each, daily. The average waste being only about five per cent. in heating. Trestle work is being built around two sides of the mill, over which the coal used in the works will be brought directly from the mine and deposited where needed. The engine in the rail mill was built by Totten & Co., of Pittsburgh, being vertical, with forty-inch cylinder and thirty-six inch stroke, driving a fly-wheel of sixty-two tons weight, and making 70 revolutions to the minute. The puddling mill engine is also vertical, thirty-two inch cylinder, thirty inch stroke, driving a forty-ton fly-wheel forty-nine revolutions per minute. The rail train is two-inch, muck train eighteen-inch. Milwaukee and Iron mountain iron is used with old rails.—*Iron.*

851. The Hot Blast.—Prof. Akerman, of the Polytechnic Institution of Stockholm, and Prof. Turner, of the mining school at Leaben, in Austria, have published their views concerning the influence of the hot blast in the furnace. Akerman contends that the great increase in temperature, and the consequent economy of fuel, is chiefly attributable to the circumstance that the heat which is carried by the blast into the furnace, as compared to that created by the combustion of the fuel, is introduced therein without increasing the volume of the gases, as a greater bulk of expanded gas, escaping at the furnace top, will naturally carry more heat with it. Seeing, however, that a hot blast of only 350° to 450°, Fah., will cause an economy of 25 per cent. of fuel over a cold blast, Turner asserts that, besides the actual quantity of heat which the blast carries with it, its favorable influence must be sought in the fact that it facilitates a rapid and complete combustion of the fuel, forming carbonic acid only, which again is not so readily reduced to carbonic oxide, as Akerman and Bell seem to take for granted. While Akerman is of the opinion that, for producing white forge pig, the temperature of the blast should not be raised above 500° Fahrenheit, it is claimed that in Styria white and mottled pig irons are constantly produced with hot blast of over 900° Fahrenheit—when the burden is only fluxed with somewhat more lime, the pressure of the blast diminishes, and the furnace widens to some extent.—*Am. Exch. and Review.*

852. The Largest Steam Engine in the World.—Pittsburgh claims to have in progress of construction a pair of engines which will be the most powerful in the world. Reducing the capacity of some of the largest pumping engines to a uniform lift of one foot in twenty-four hours, it is found that the one at the Lehigh zinc mines will lift 3,446,000,000 gallons; the pair at the Chicago water works, 4,500,000,000 gallons; the pair at Haarlem, Holland, 10,000,000,000 gallons; while the new Pittsburgh engines will lift 14,240,000,000 gallons. The pair will weigh 1,500 tuns, and will cost $423,550. The following dimensions will serve to give some idea of the magnitude:

Cranks, nine tuns; shaft, twenty-four tuns; four sections of the two valve chambers, one hundred and twenty tuns; fly wheel, seventy tuns. The four plungers will weigh upwards of four hundred tuns. Cylinder, sixty-four inches diameter; stroke, 14 feet. Plungers forty inches diameter; 11 feet stroke. This ponderous piece of machinery will be used to raise water into Highland avenue reservoir in Pittsburgh, a height of 356 feet. It is estimated it will raise 70,000,000 pounds of water for each hundred pounds of coal consumed, the cost being at the rate of one cent for every 3,070 gallons.—*Sci. Am.*

853. A Boulder in Coal.—The last received number of the *London Geological Magazine*, one of the most instructive and interesting publications of the scientific press, commences with Mr. Banney's account of a boulder of quartzite found enveloped in the coal of the 13th bed of the Cannock and Rugeley Colliery, South Staffordshire, 540 feet beneath the surface. It is 19 inches square by 4 inches thick, and weighs nearly 14 lbs. It was probably floated in the roots of a tree into the marsh vegetation which formed the coal bed.—*U. S. R. R. and Min. Reg.*

854. Gas from Petroleum-Tar.—A man tells the *Scientific American* that he "makes the gas to light our building in iron retorts, from what is known in the trade as 'residuum.' It is the black tar-like oil from refined petroleum; it makes good gas, but is quite expensive on account of the high heat required, and the amount of fuel (coke) it requires to get up the heat. Is there anything we could use that would not require so great a heat and that would be equally as free from danger in using? The high heat soon burns out the retorts and new ones are quite expensive." Wonder if he has heard that crude petroleum is selling at $1.50–about half what its residuum costs.—*Nat. Oil Jour.*

855. Washoe Coal.—Speaking of Washoe coal, the *Territorial Enterprise* says:

Some parties in this city, who are mining for coal in El Dorado Canyon, Lyon county, eight or ten miles beyond Dayton, are meeting with very flattering success. At no great depth, they have found a very promising vein of coal, several feet thick, which burns well and freely, and which contains no sulphur. The coal appears to be lignite, and in appearance does not differ materially from other deposits of that mineral that have at various times been opened in that section of the State. About two tons of the coal have been brought to this city. We yesterday saw some of it tested in a small coal stove, and it seemed to burn about as well as any other coal could have done. A fire made of it at nine o'clock in the morning was still burning when we saw it at half-past one P. M. It leaves a considerable quantity of ashes, which appears to be due to a kind of sediment composed of calcareous matter mixed with the coal at the time of its formation. At a greater depth on the vein this will doubtless disappear. We hope the mine may prove to be all that its owners believe it promises to become.—*Min. and Sci. Press.*

856. Nitrate of Amyle.—This is one of the new numerous products of coal-tar, and a few drops on the handkerchief will, when inhaled, prevent epileptic fits, and relieve asthma.—*Manf. and Builder.*

857. English Gas Patent.—C. W. Harrison, High Holborn, Middlesex. Improvements in the treatment and use of air for the manufacture of gas for lighting and heating purposes, and in the apparatus employed therein.—A method of oxygenising air by passing it under pressure or otherwise through water or any other suitable liquid that will absorb a larger proportion of the oxygen of the air than of the nitrogen. The air thus oxygenised is recovered from the water by a pump or other suitable means, and stored for use in a holder, whence it is conveyed by pipes to where required for use, and is then passed through a suitable hydrocarbon and thus converted into inflammable gas or vapor adapted to heating and lighting purposes.

Iron refers to this patent in the following terms:

Mr. C. W. Harrison has a kind of supplement to his invention of Air-gas for lighting and heating purposes, wherein there seems to be some "solution of continuity" between the ends and means proposed. The object is to oxygenise air previously to its being passed through a suitable hydrocarbon, for conversion into inflammable gas or vapor; the presumption being that the excess of oxygen will increase the heating and illuminating power. The process, however, consists in passing atmospheric air, under pressure or otherwise, through water, or any other suitable liquid, "that will absorb a larger proportion of the oxygen of the air than of the nitrogen," which would seem to have exactly the opposite effect, namely, of de-oxygenising it.

858. On the Condensation Products of Illuminating Gas.—R. Gasch.—The lowest temperature possible for destructive distillation is shown theoretically and practically to be the best for the preservation of a maximum of illuminating vapors in the gas. The temperature of the condensers, scrubbers, and purifiers has much effect on the quality of the gas obtained. If the temperature of the condenser is too high, or the proportion of other oils to naphthalene is too small, or the temperature of the pipes through which the gas passes is made too low, the danger of choking the pipes by naphthalene is incurred. Such stoppages are more apt to occur in autumn and spring than at other seasons, the differences of temperature between day and night or between two consecutive days being then greater.—*Journal fuer Gasbeleuchtung.*

859. Determination of Ammonia.–M. A. Houzeau.—The gas before entering the meter is passed through 5 c. c. of sulphuric acid containig 0·30625 gr. of ammonia. This acid liquor is colored by a few drops of litmus, and gas being passed through until it becomes blue, the proportion of ammonia is readily determinable by the quantity of gas treated as read by the meter.—*Chem. News.*

860. Sal Ammoniac in the Hydraulic Main.—R. Gasch.—The presence of the chlorine was a source of wonder, and it was found to come from the Zwickau coal. The water is sometimes so completely saturated that the salt crystallizes out on cooling. The tar of the main was found to contain 25 to 50 per cent of ammonic chloride. The result of the use of these coals was to cause more carbonic acid in the gas, as the chlorine compounds prevented the formation of ammonic carbonate.—*Journal fuer Gas-beleuchtung.*

861. Safety Lamps.—Some valuable researches on the conditions under which safety lamps are truly safe, have been conducted by M. R. Galloway, partly at the new laboratories at South Kensington, and partly at the Meteorological office, in London. Mr. Galloway has already found that if a Davy lamp be burning tranquilly in an explosive atmosphere, the transmission of a sound wave, produced by slight explosion of gunpowder, is sufficient to determine the communication of flame from the lamp to the surrounding atmosphere. Hitherto, it has generally been assumed that the occurrence of a colliery explosion, after firing a shot, is due to actual communication of flame from the gunpowder to the fire-damp; but Mr. Galloway's experiments show that it is much more likely that the explosion is determined by the noise of the shot being promulgated through the galleries of the mine to the safety lamps. An admirable experiment to illustrate this point, was exhibited by Dr. Spottiswoode, at a recent lecture at the Royal Institution. A lighted Davy lamp was surrounded by streams of coal gas, issuing from a number of jets around the base of the lamp. One extremity of a long tin tube, open at both ends, was placed in connection with the lamp, while a pistol was fired at the other end, a caoutchouc diaphragm being interposed in the tube to prevent the transmission of a direct current or air. The sound wave, generated by the report, traveled along the tube, and as soon as it reached the flame, caused ignition of the surrounding atmosphere—the lamp being immediately enveloped in flames.—*American Artisan.*

British Association of Gas Managers.

TUESDAY, JUNE 10.

Mr. J. Eldridge (Richmond) read a paper "On the Application of 'Coffey's Still' for the Extraction of Ammonia."

At most of our annual meetings the attention of members has been called to the various modes of washing, scrubbing, etc., with a view of extracting ammonia and other impurities from the gas before it reaches the purifiers.

When sulphate of ammonia is made in large quantities a vessel called a "column," or "Coffey's still," is used, in which ascending steam is made to come in contact with descending streams of ammoniacal liquor, and the ammonia thus becoming vaporized passes from the still through a pipe to the saturator.

A similar vessel is sometimes, though not frequently, used on gas works. I have one in use on our works, and as it has proved very effective I now proposed to give a brief description of its construction and working for the benefit of those who may not have seen one. It can be made of any dimensions. A drawing was shown of one 24 feet high, 4 feet wide, and 2 feet thick, cast in eight 3-feet lengths, with flanges, and put together with bolts, nuts, and lead pipe in the usual way.

From below the outlet to just above the inlet are a series of shelves 3 feet 4 inches long, and about 8 inches apart, thus leaving an opening of 8 inches by 24 inches at each end. These shelves rests on fillets cast on the side of the still, the open end of the one being over the end of the other, which is not open, and in some measure resembles a series of steps. On the open end of the shelf is a ledge half an inch high, so that each one has always water over it to that depth. The water is pumped in at the top of the still through a 2-inch pipe, when it falls on the first shelf, runs over the ledge at the end to the next one, and so on down through the whole till it reaches the bottom, thus forming a continuous stream of two feet wide and hal an inch thick, as well as a series of small waterfalls. The water runs out at the bottom into a tank, where the outlet pipe is, of course, sealed in the usual way.

The pipe through which the water is supplied at the top may be of any size, or can be regulated by a valve so as to give whatever quantity may be thought necessary, according to the make of gas. The gas entering at the bottom of the still passes backwards and forwards in the course of its ascent, and comes in contact with all the descending waterfalls, and, of course, over the water on each shelf.

On the works of which I am manager we have a good sized coke scrubber, through which we pump the ordinary ammoniacal liquor over and over again at the rate of about 1000 gallons per hour, till it is about 16° of strength. The gas then passes through the still, in which water is used at the rate of 1000 gallons per hour, till it is about 8° of strength, and it is then used for making sulphate.

In the ordinary coke scrubber the tar and coke frequently become nearly a solid mass, causing a great deal of pressure. Mr. Anderson, when speaking on this subject at Nottingham, in 1867, said, "he had seen, at the opening of scrubbers, certain sinuous channels through the coke, which channels were glutinized with tar."

In the still the least obstruction is impossible, and the pressure is therefore *nil*—a feature which all managers will readily appreciate. I am aware that scrubbers charged with boulders, brickbats, broken bottles, drain-tiles, etc., or fitted with boards, are less liable to become obstructed by tar than those containing coke; still the remarks about pressure apply more or less to the whole.

Another advantage of the still is that it requires no distributing apparatus; the water is simply pumped in through the pipe on the top, and rushes from shelf to shelf till it reaches the bottom.

We all know that in the ordinary coke scrubbers there are frequent difficulties in the distribution of the liquid. The "Barker mill" will sometimes get out of gear; the revolving brushwood—excellent as the plan is—sometimes gets clogged with tar; the simple perforated pipe becomes partly stopped, so that it is not an uncommon thing for the gas to be passing through what may in some measure be called a dry scrubber. This is impossible with the still. Another advantage is that the still is very simple and economical in its construction.

I wish to say, in conclusion, that these few remarks on rather an important subject are respectfully offered to those who, like myself, are managers of comparatively small works. Speaking from experience, I have always found in the use of the still that the whole of the ammonia has been taken out of the gas, and of course utilized, and the expense of purifying materially reduced.

Mr Eldridge said that Mr. Sugg firsf called his attention to the Coffey still, and strongly advised its use. He might further state that Mr. Barclay, of Tottenham, had used the still with great success for a number of years.

Mr. Syms (Rochester) suggested that the value of the process would be much more intelligible to the meeting if Mr. Eldridge would give the proportion of water per 1000 cubic feet of gas instead of the quantity passed per hour.

Mr. Warner said the reader had suggested doubts as to the stoppage of washers, but for his own part he could not understand why boards placed perpendicularly, or only at a slight inclination, should be more likely to stop up than horizontal bars. In the paper read before the association upon scrubbers, two years ago, it was clearly shown that with boards such as Mr. Livesey and he (Mr. Warner) employed there was no tendency to stoppages.

Mr. Watson (Sydenham) asked for information on two points—first, whether Mr. Eldridge relied entirely on this scrubber—for after all it was a scrubber—for the removal of ammonia; and secondly what amount of ammonia per 1000 feet was left in the gas after passing through it.

Mr. George Anderson (London) said he had been in hopes that the paper just read would have gone into some statistics as to the manufacture of sulphate of ammonia, because the fact of that article being made by Coffey's still was an old affair. All the members of the association who were present at the meeting held in London some seven years ago, and paid a visit to certain chemical works there, had the opportunity of seeing the manufacture of sulphate of ammonia upon a large scale entirely by the use of the Coffey still. Perhaps Mr. Eldridge in his reply would be able to furnish the meeting with some facts showing the economy of the process he adopted, the amount of acid necessary, the quantity of coals used per ton, and each other practical statistics as would enable them to judge of the value of the process as compared with other modes of manufacture. If he (Mr. Anderson) understood Mr. Eldridge aright that gentleman said he used a second still; if so, that was not a good mode of extracting ammonia. Mr. Eldridge stated that while the gas was passing upwards he had a stream of water passing at the rate of 1000 gallons per hour down the various shelves of this apparatus, and that in this way such a neighborly action went on between the gas and the water that the ammonia was extracted. Now he (Mr. Anderson) must say he was afraid that there being a space over the water on each shelf and between it and the next there would not be so good a contact as if the gas had to pass through and alongside pieces of coke, saturated with water, of various sizes, large at bottom and small at top of the scrubber. Unless means were taken to cause the gas in very fine particles or divisions to pass through the scrubber, he did not believe the ammonia would be extracted profitably from the gas. There was also another remark to be made. If the gas were allowed to go into the scrubber before the tar and all the liquid products were thoroughly extracted from it, he should not call that good engineering. In order to do that as far as possible in the works with which he was connected he used a water washer. In that washer he put the washings of the scrubber, as also the ordinary ammoniacal liquor from the works. By passing the gas through the ammoniacal liquor he got rid of the tar; and he might here state that he had a scrubber in use at the present time which had been in action since 1864 or 1865, and had never been opened until last week. It was then opened by his direction, not because it had ceased to act, but because at this season of the year it was well to inspect every kind of apparatus on the works. Certainly this scrubber had been in action during the whole of the time he had named, and there had never been anything wrong with it. He believed the cause of this was that he got rid of the tar before the gas went into the scrubber. In that scrubber he did not use ammoniacal liquor as Mr. Eldridge did, because he did not believe that by so doing he could entirely, though perhaps he might partially purify his gas from ammonia. If they passed gas through ammoniacal liquor of 6 oz. strength, for instance, and then passed it through water or ammoniacal liquor of 12 oz strength, they would have their gas pure. To purify gas from ammonia they must either use some acid or allow the gas in passing last through the scrubber to pass through pure water. If they pumped ammoniacal liquor over and over again up to 16° strength, what was the result? Each time as the liquor became stronger and stronger the less affinity had it for extracting ammonia from the gas. Now he contended that all this pumping over and over again was a mistake. They had no business to pump at all, and if their scrubbers were properly constructed they had no necessity for it. They should put through their scrubbers as much water as was equal to the ordinary quantity of ammoniacal liquor. He was in the habit of putting 10 or 12 gallons of pure water through his scrubbers from the top, and he thus obtained 20 to 22 gallons of ammoniacal liquor per ton of 12 oz. strength throughout, and he had a practically pure gas. He believed that if the scrubbers were made high enough and the water was put through slowly, there would never be any necessity for pumping. Then in addition to the scrubber there should be a previous washing to prepare the gas for the scrubber. Thus operating, they could, by methods long in practice and well known, perform all that was possible of attainment by any new and fanciful processes.

Mr. Eldridge in reply said, Mr. Syms asked the quantity of water per 1000 cubic feet he employed. At the present time in his works he used 1000 gallons per hour, passing about 7000 cubic feet of gas during the same period. Mr. Warner did not agree with his comparison of this still with scrubbers in which boards were used. But he did not mean to say that in all cases where boards were used there must necessarily be stoppages, but that there was a tendency in almost all of them to that result, whereas in the Coffey still it was perfectly impossible. Mr. Watson asked whether he depended upon this still alone for the extraction of his ammonia. He had already stated that he first used a scrubber charged with coke, which took out a considerable portion of the ammonia, so much so that by pumping the ordinary liquor over and over again, he got it up to 140° strength. Nevertheless a great deal of ammonia did pass to the still, otherwise he should get the water pure. He found, however, in the winter that after using the still for a day or two the water came up to 7° or 8° of strength. Mr. Anderson and Mr. Watson both asked for statistics. All he (Mr. Eldridge) could say was that he had not gone into them at all, and did not read the paper with any reference to the manufacture of sulphate of ammonia. He therefore could not answer the question as to the amount of acid necessary, nor the quantity of coals used in the manufacture per ton of sulphate; his object had simply been to show the utility of the still in the manufacture of gas. He might state that only a short time ago he had occasion to stop the still for about twelve hours, and his purifiers were off twelve hours sooner, which he thought was conclusive proof with regard to the value of the apparatus in purification. Since he had had the still in operation the produce in sulphate of ammonia had been very much greater. The question was asked whether the still did really take out the ammonia. The fact he had stated, that by using clean water he obtained, after a while, 7 oz. or 8 oz. liquor, was a proof that it did take it out.

The President said the association was much indebted to Mr. Eldridge. The first application of what might be called an approximation to the Coffey still, was a condenser erected by the Dover Gas Company thirty years ago. It was in the form of a flat worm. The hot gas was admitted at the top and the coal gas passed out at the bottom, so that the condensible matter met the gas in the opposite way, and it was the most effective condenser he knew of. The same plan was adopted by Mr. Barclay, at Tottenham, where the main was put up as a boundary to the works. It was laid in a horizontal position, with a slight fall. The gas went in at one end, the condensible matter met it in the opposite direction, and it became a most effective scrubber.

Mr. Warner asked whether the condenser at Dover was in use before one of the same kind was used at Birmingham.

The President said he could only state that it must have been about thirty years ago.

Mr. Garnet (Hyde) said there was one at Portsea thirty-five years ago.

The President remarked that it was thus we sometimes thought we had something new, which, upon investigation, was found to be very old.

Tennessee Oil Lands.—That Tennessee possessed oil lands of apparently great value became known soon after the close of the war: but after a few wells had been sunk, it was found that so few means of transportation existed as to render even flowing wells almost useless, and work was abandoned. The valuable discoveries are not to be suffered to remain permanently unemployed, for a new railway, designed to afford an outlet for the product of the wells, is rapidly building through Overton county. A new oil-hunting mania may agitate the country within the year, when once discoverers can bring their oil to Eastern markets.—*Coal and Iron Record.*

Prof. Silliman's Report on Water-Supply of Norwich, Conn.

[To our regret, the close calculations necessary to us, nowadays, as to space preclude anything more than a very condensed abstract of this careful and valuable investigation.—Ed.]

To the Board of Water Commissioners,
City of Norwich Water Works.

Gentlemen: I have the honor to report to you the result of my examinations of your reservoir, and of the samples of waters collected by me on the seventh inst.

The reservoir is an artificial lake, formed by a dam built across the ravine between two hills of crystalline rocks of the granitic family, situated about 2½ miles northwest of your city, and draining both into the Yantic and the Shetucket rivers.

The margin of the reservoir is quite clean, and free from any causes of impurity. The water-shed discharging into this reservoir is largely in grass or upland mowing ground, with some woods and orchards, with but few houses or farm buildings upon the slopes, consequently no sewage, or water contaminated with animal matter, finds its way into your reservoir.

An excellent dry wall, more than 2 miles in circuit, encloses the reservoir and shuts off, to a great extent, the shallow margins which often form an objectionable feature in both artificial and natural lakes.

It appears from the statements of your report that the bottom of this reservoir has been prepared for flowage by removing nearly twenty thousand stumps of trees, and that the entire bed of the lake was cleaned over, and all soil containing grasses or roots entirely removed. The thoroughness of this work may be judged by the fact that over three hundred thousand cart-loads of materials were excavated and removed. I may remark that this is an unusual degree of care and thoroughness in the preparation of ground for flowage—many such works, within my own knowledge, having been completed without any such needful care. The only additional precaution which could have been taken would have been the shingling of the scarfed surface with clean gravel and sand.

The average depth of this lake is stated at over 16 feet. At the lower end, near the well house, it is said to be over 30 feet. At the time of my visit the water was drawn down over 5 feet below high water point, but it was then rising, and I found it over 22 feet in depth at the point where my sample, No 1 was drawn, which was not quite the lowest, although the most convenient point at which I could obtain samples in depth. It is calculated that each half-inch of depth of the lake is equal to one million of gallons, and consequently the lake, at the time of my visit, was about one hundred and twenty millions of gallons below its maximum capacity, which is stated at about three hundred and sixty millions of United States standard gallons. The present consumption of your city is stated under one million of gallons daily.

OF THE WATERS.

Several citizens informed me that the water had lately been offensive both to taste and smell.

Some remarked upon the odor, as well as taste, being offensive. The most general statement was that the water had a "*fish-like*" odor or flavor, while others simply compared it to *bog-water*, or *pond-water*.

On the 7th of January I made visits to several points where all agreed it had been the most offensive.

The color was slightly yellowish brown, and I fancied in one or two places that the flavor was a little marked by the vegetable extractive matter, which was the cause of the color. I was assured in all the places which I visited, that some two weeks before there was no difficulty in finding the qualities which all, equally with myself, agreed were now sensibly absent.

Five samples of your water were collected, as follows:

1. One from the surface of the lake, at a hole cut in the ice.

2. One from the depth of 12 feet below the surface of the ice.

3. One from near the bottom of the lake, at the depth of 22 feet,

4. One from the waste-wipe—which draws off the water from the very lowest level of the bottom.

5. One from the tap in the house of Mr. S. G. Richmond.

They were compared for color with pure distilled water, in a similar vessel. All were some shades of "off-color," the tint being slightly yellowish brown, the usual color of pond water.

At the temperature of the room, all had the taste of soft water.

It is a fact well-known to wine-tasters that if wine is largely diluted with water it develops every disagreeable flavor which the water may contain, even if this is not sensible when the water alone was tasted. Sherry wine is the best wine for this test. By using this test a slightly disagreeable flavor was brought out in No. 4, while the other samples were free from any disagreeable flavor.

Smell.—There was no odor sensible to myself, or several other persons who tried this test at 60° F., in the same glass vessels used for the comparison of color; these samples being gently warmed to 100° F., also with a negative result. At the Wauregan house, the landlord mentioned that sometimes they noticed a disagreeable odor when the water was warmed. He was good enough to turn on the steam-heated digester for trial, in his kitchen. We all sniffed at the vessel from the time the water was turned on until the water boiled, and all agreed that no odor of any kind was to be detected. I must therefore conclude that the element of disagreeable odor, found by others four weeks since, had disappeared at the time of my examination.

In your waters the microscope revealed abundance of the disintegrated fragments of the more commonly occurring forms of diatoms, but by no means so many in either number or variety as are found in the water of the Croton, at Central Park, in New York. There were also casts of epitheleal cells, fish casts, a few fragments of confervoid growth (green scum), etc. Most of these were from the sediments in number 1. In the sediments from number 4, some of the same forms were seen mixed with minute scales of mica, quartz, and other minerals, driven out by the violence of the discharge from the water pipe. In the other samples almost no sediment occurred, but a few filaments of organic matter floating about, and of no significance. On the whole, the comparative absence of the living organisms is remarkable. This is due in part, no doubt, to the water being collected in very cold weather, when these living organisms are less numerous than in summer.

Trout.—Since this lake was formed it is said the trout have multiplied very greatly in its waters, and some black bass of the lakes have also, I understand, been introduced. Fishing in your reservoir is prohibited with a view to encourage the multiplication of trout and other species. The popular opinion is in favor of a trout or bull-frog in the well, as a means of destroying worms or other animals, obnoxious to our notions of purity. This feeling, no doubt, prompts the desire to multiply and protect the fish in your reservoir. But I have been led to ask myself, if this might not be carried too far? Too many large fish in a limited volume of water may certainly impair, rather than preserve its purity. I am by no means prepared to say that the "fish-like flavor," which some have detected in your water, is due to this cause. I have myself failed to detect the flavor in question, where others find it. But the comparative scarcity of animalcula suggests the inquiry whether the fish have not devoured them, and thus impaired the balance of organic nature?

ANALYSIS.—TABLE 1.

Showing Weights of Impurity in Grains and Hardness, in one Standard Gallon of Water Supplied to the City of Norwich.

No.	Source.	Mineral Matter.	Organic and Volatile Matter.	Total solids Impurities.	Hardness.
1.	22 ft. from surface of Lake	1.166	0.700	1.866	0.560
2.	12 ft. from surface of Lake	1.149	0.600	1.749	0.540
3.	Surface of Lake	1.050	0.583	1.633	0.510
4.	Waste Pipe	1.399	0.700	2.099	0.560
5.	Faucet at Richmonds	1.071	0.795	1.866	0.560
	Average	1.167	0.676	1.844	0.546

It is, however, by comparison with other well-known waters that we obtain a relative judgment of the purity of this water of Norwich.

TABLE II.—PURITY OF CITY WATERS.

Impurities Contained in One U. S. Standard Gallon of 231 Cubic Inches, Expressed in Grains.

City.	Source and authority.	Mineral or Inorganic matter.	Volatile and organic matter.	Total Solids.	Hardness.
Norwich,	Lake average, 1873 (Silliman.)	1.167	0.676	1.844	0.546
Boston, Mass.	Cochituate, 1845 (Hayes.)	2.44	1.23	3.67	
" "	" 1871 "	2.37	0.83	3.20	0.49
Charlestown, Mass.	Mystic Lake, 1861 (Silliman.)	7.50	2.08	9.58	3.46*
" " "	" " 1871 (Hayes.)	3.96	1.72	5.68	0.85
Fall River "	Watuppa Pond, 1870 (Appleton.)	0.96	0.84	1.80	0.20
Providence, R. I.	Pawtuxet River, 1867 "	1.24	1.33	2.57	0.57
Hartford, Conn.	Conn. River, 1861 (Silliman.)	1.82	1.25	3.07	1.64
" "	Trout Brook, 1851 "	1.96	1.95	3.91	1.19
Springfield, Mass.	Chicopee River, 1871 (Hayes)	1.72	1.24	2.96	0.20
New York.	Croton River 13 wks. '67 (Chdlr.)	3.30	0.66	4.56	2.51
"	Croton River, 1868 (Chandler.)	3.31	1.14	4.45	
"	" 6 mos. '69, "	4.11	0.67	4.78	
Albany, N. Y.	Hydrant, (Horsford)	8.47	2.31	10.78	
"	Hudson River, 1872 (Chandler.)	5.424	0.699	6.123	3.50
Rochester, N. Y	Genesee River, 1871 "	12.020	1.23	13.25	
Chicago, Ill.	Lake Michigan, (Blaney.)	5.62	1.06	6.68	

These examples might be greatly multiplied, but the above will probably suffice to show your citizens that the Norwich water is exceptionally pure, in both organic and inorganic impurities, as well as in hardness. This would be still more evident if we were to quote English examples. The River Thames, at London, for example, has over 16 grains to the gallon of solids, and its hardness is 14 degrees. Many people even yet believe wells to be more pure than lakes or reservoirs, or rivers. This is particularly erroneous, as may be seen by inspecting the following table of well waters:

(*See Table III, on next page.*)

I find no recorded analyses of the well-water of Norwich, but presume it must be about like that of Providence and Fall River, above quoted.

CONCLUSION.

The results of this investigation appear to me to sustain the conclusions,

That the Norwich water, as compared to other city waters, is of exceptional purity.

That remarkable care and good judgment have been exercised in preparing the lake, or reservoir, to secure cleanliness and freedom from objectionable circumstances.

When the water is shut up in the mains, under a pressure of five or six atmospheres, the air dissolved in the water is greatly condensed, and when the pressure is relieved at the tap the water rushing out with force foams and sparkles with escaping air, carrying with it the peculiar odor of the vegetable matter. Hence it appears by such evidence as I have been able to obtain, the annoyance is temporary.

The water, at first offensive, allowed to stand a few hours has lost all odor. I venture to predict that the evil will disappear, as it came, without any assignable reason, and that your water will steadily gain favor with all classes of citizens.

I have the honor to remain, gentlemen,

Your obedient servant,

B. Silliman.

New Haven, January 20th, 1873.

* Mystic Lake is an arm of the Sea, cut off from tide by a bar, with its bottom much below sea level. Only its surface water is used; its solid contents, chiefly marine, increase with depth; at 21 feet 18.53, and at 50 feet from surface 63.68 grs. were found by me in 1862.

TABLE III.

Composition of Various City Wells, in Grains per Gallon.

City.	Source and authority.	Mineral matter.	Organic matter.	Total Solids.	Hardness.
Springfield, Mass.	Average of 5 wells, 1871 (Hayes.)	10.49	2.24	12.73	3.13
Boston, "	Well on Beacon st., 1843, (Silliman.)	50.05	1.21	51.27	
Hartford, Conn.	Old State House, 1847, (Silliman.)			46.55	10.55
Providence, R. I.	Average 24 wells, 1868, (Appleton.)	24.07	8.77	32.84	10.92
Fall River, Mass.	Average 17 wells, 1870, (Appleton.)	25.16	7.00	32.16	12.17
New York.	West of Central Park, (Chandler.)	38.95	4.59	43.54	
"	Well in 22d St., 1864, (Draper.)	24.29	23.88	48.17	
London, England.	Leadenhall St., (Letheby.)	90.38	9.59	99.97	50 00

Trial of the New Electric Light Machinery at the House of Commons.

Gramme's magneto-electric machine has been now for several months before the public, and the effects obtained, says *Engineering*, have been of such a nature as to confirm our statement that, scientifically and practically, it is one of the great inventions of the age.

The essential requisite for the production of electric light is, that the machine evolves a current of considerable quantity and tension, for experiment proves that the most effective arrangement for illuminating purposes is neither quantity nor tension alone, but a combination of both, which may be easily obtained by paying due attention to the gage and length of the wire, the connection of the bobbins, and the speed with which they are driven. In the present case, the velocity need not exceed a maximum of 350 revolutions per minute.

Such a moderate rate obviates the great inconveniences caused in other machines by the overheating of the armatures. This is the great drawback in Ladd's and Wilde's apparatus, which in other respects are admirable pieces of workmanship and skill. Practically this advantage appears to us to be of as much importance as the distinguishing feature of the Gramme itself, namely, the absolute continuity of the current, and its uniformity of direction. This developement of heat causes not only mechanical inconveniences, but also, by raising the temperature of the conductors, it increases the resistance and thus diminishes the strength of the current. Now the heat developed in the Gramme machine becomes perceptible only when the work to be done is not proportional to the current generated. But as the electro-motive force varies with the rapidity of rotation, it is evident that the latter may be regulated to suit the requirements of the case. By attending to this, little or no heat may appear in the coils, and a very large fraction of the power expended may be converted into useful work. On the night of May 25, we had the opportunity of examining the apparatus on the clock tower; the speed was only 300 revolutions per minute. The machine is in the engine room under the Peers' lobby; the interpolar wires are bracketed to the walls from which they are insulated by passing through the space between V shaped pieces of edonite. The wires are not covered, insulation from the air being deemed unnecessary. They are carried from the engine room to the lantern of the tower, a distance of of 900 feet; consequently three times that of the Foreland, and the greatest distance, we believe, the terminals of an electric light generator have as yet been carried. The gage used is the 000 B. W. G., or .425 of an inch in diameter. The intensity of the light on the 25th of May was equal to 8,000 candles. Very dark glasses were required to look at the lantern even from a considerable distance. The beam, as it shot through the air, reminded one of the lustrous silvery appearance of the comet of 1858 when in perihelion. At the place illumined by the beam, objects could be seen, and books and letters read with as much ease as in solar light, allowance being made for the mellowness of the one and the brilliant argent color of the other. At Trafalgar square, a very black shadow of the pillar was cast over the National Gallery; at the Duke of York's column, a very pleasing effect was produced by the sharp and well defined shadows cast by the trees and their foliage. At these two places, we endeavored to realize the difference between the electric light and that emitted also from the clock tower by the 300 gas burners of Mr. Wigham, enhanced by the most elaborate optical aids; and we must say that the contrast was indeed very striking, a few minutes having elapsed before we were able to discover the path of the beam projected by the latter. In the immediate vicinity of the Houses, Mr. Wigham's light is very soft and pleasing to the eye; but at a distance, by no means considerable, it is scarcely visible. Perhaps the proximity of the electric light may contribute to diminish its splendor; if so, the results are all the more in favor of the new machine.

The carbon points are eight inches long and half an inch in thickness. They last for about four or five hours, and then require to be replaced.—*American Artisan.*

Two Dollars per Barrel for Oil.

Referring to the wonderfully low prices for petroleum that rule in the oil country, a contemporary says:

"This price is one of the mysteries of the age. Every nation and clime, save the cadaverous refiners and the "Shent per Shent" exporters, are willing to pay an equivalent for the product of this risky enterprise (oil producing). The impecunious condition of the producer is heralded to Antwerp, Bremen, Liverpool, New York, and Philadelphia. Refiners' Associations lend a willing hand to crush out what little is left, by sending a wail to the region "too much oil," and selling short at a price which they know the crude cannot be produced at, and the poor producer is eager to eat the crumbs from the master's table. Unfortunately, the producers, from the want of organization, are unable to enlighten themselves as to the true situation of the outside markets, and take for granted that all is gospel which the Association buyer tells them. We firmly believe, from a very close study of the situation that we are not to-day producing as much oil as the world demands. Our markets at home and abroad have nearly doubted their demands, while our production is not over fifty per cent. greater than last year. A few figures, guaranteed to be reliable, will not be amiss:

	Barrels.
The increase of exports from New York over last year is	22,500,000
Same from Boston	206,107
Same from Philadelphia	6,500,000
Same from Baltimore	530,000
Increase of exports over same time, 1872.	29,736,107
The total export from the country from January 1st to June 10th, 1871, was	53,000,000
Same time, 1872	50,000,000
Same time, 1873	79,500,000

"Many would suppose, from this great increase of exports, that the markets abroad were full to overflowing. The contrary is the fact. New consuming markets opened for the commodity take very much of this increase, as will be seen by the following statistics, compiled from shipping lists:

	Barrels.
To the Dutch East Indies (entirely new market, there has already been shipped this year	500,000
To Venice (new market)	150,000
To China and East Indies (increase)	2,000,000
To Central America (increase)	30,000
To Africa (increase)	100,000
To Australia (increase)	500,000
To British West Indies (increase)	100,000
To Cadiz and Malaga (increase)	500,000
To Taragona (increase)	500,000
To Cette (new market)	100,000

"This same ratio of increase shows itself in almost every available commercial point of the globe. The orders now at the seaboard are far beyond the tonnage capacity of the oil marine. Philadelphia alone needs tonnage for near two hundred thousand barrels more than is at present available. With these facts before us, why are we so eager to give this commodity at *less than cost* to the world? Is it not taxing American industry for the benefit for the benefit of foreign countries, unsolicited?"

The Coming Pavement.

Recently there has been laid down on Fifth avenue, at its intersection with Broadway in this city (24th street), a trial specimen of the new Grahamite asphalt pavement. The example in question covers the street for half a block, and is placed just where it will receive the severest tests, from the wheels of omnibuses, ice carts, and throngs of vehicles of all sorts. If the new pavement can stand the racket here, no other test will be required. So enormous is the travel in this part of the city that the cross-walks, made of thick granite slabs, are soon grooved with ruts, cut by the wheels of heavy vehicles.

The new asphalt pavement is composed of a material termed Grahamite, found in West Virginia, and is alleged to possess more cohesion, tenacity, and elasticity than the famed *Val de Travers* asphalt so extensively used for paving purposes in Paris and other European cities.

Grahamite does not fuse until it reaches 800° Fah., while the ordinary asphalts generally fuse below the heat of boiling water. The higher fusing point is due to the large quantity of asphaltene which the Grahamite contains. The Grahamite pavement possesses a high degree of elasticity, which affords great relief to the feet of horses and prevents the wear of vehicles; it is also so tenacious and hard that it will stand the heaviest blows from a sledge, only suffering compression at the surface. We have seen this test repeatedly applied, and have further noticed that the heaviest vehicles roll over it without making the slightest impression. It presents an even surface and forms, in every outward respect, a most admirable pavement. If the example now under trial shall prove, on the lapse of time, to be as really good as it now is, we have no doubt that our citizens will be glad to give it a general introduction. Wood pavements are a failure, and granite blocks are dreadful to travel upon. It may be that Grahamite is the coming pavement.

The pavement question deeply concerns every city and town in the land: and if anybody wants a subject to study upon, with a view to devising improvements, here is a grand one.—*Sci. Am.*

[The passage about "asphaltene" in the above is somewhat sickening. As all chemists know familiarly, there is none of the spurious substance called by Boussingault "asphaltene" in grahamite, and moreover that there is no such substance (chemically speaking) as asphaltene in Nature.

The present writer does not know whence our respected contemporary got his information about the composition of the peculiar mineral species which the writer himself called by the specific name *grahamite*, in view of its specific nature, which has been fully set forth in the columns of this Journal, and has passed into the text-books of science (*vide* Dana's Mineralogy), "asphaltene," and "petrolene" were unfortunate *inventions* of an illustrious chemist, and were abandoned even by their inventor. They have long since gone into limbo. Will not our *confrere* let them there rest in peace? Grahamite has about as much, or as little, relation to "asphalt," as cheese has to chalk.]

Correspondence.

[Correspondents, in all cases, should sign their communications with their names and address in full—not necessarily for publication, but as a guarantee of good faith.—Ed.

A Circular Subject.

[The courteous tone of the communication below, requires that it be met with the reciprocal courtesy of insertion; though altogether outside of the scope of our usual subjects. Hence the Editor will not discuss the question as to whether circular degrees are linear measurements or not? but leave this paradox to the many readers it will doubtless have, of sufficient aritl.-metrical attainments to grapple with our ingenious correspondent. Doubtless some readers have more time than the Editor, for this sort of work. At least it is to be hoped so.]

New Orleans, August 21, 1873.

Mr. Editor: I desire to submit for the consideration of yourself and readers, a brief demonstration touching the relation of the diameter to the circumference of the circle; a demonstration which has long vexed the mathematical world, and often pronounced an impossibility except approximatively. This you will notice in any of our text books on Geometry; for instance, see Davis's Legendre, B 5, P 16, Scholium 2.

Of course it would illy become me to gainsay all of the able mathematicians who have existed since the days of Archimedes, who have to *their* satisfaction shown that the relation is nearly as 7 to 22, or as it is usually expressed in decimals—3,1415926, etc. I therefore simply offer the following demonstration, hoping that some skillful mathematician will point out wherein I am in error.

I lay down the statement that the relation of the diameter to the circumference of the circle is as 6 to 19 and not as 7 to 22. To prove which I take the general notation of circular measurements as my base of operations, viz:

Every circle is divided into 360 equal parts called degrees—hence if I am correct, when the circumference is given to find the diameter, I shall have the following rule, viz:

Multiply the circumference by 6 *and divide the product by* 19.

EXAMPLE.

The circumference of a circle is 360°, what is its diameter?

As this is a general notation of measurements, it matters not whether we regard these degrees each as one inch, one foot, or one mile.

$$\begin{array}{r} 360^\circ \\ 6 \\ \hline 19)2160(113^\circ \\ 19 \\ \hline 26 \\ 19 \\ \hline 79 \\ 57 \\ \hline 13 \end{array} \qquad \begin{array}{r} 13 \\ 19 \\ \hline \end{array}$$

The diameter then is 113 13-19 degrees, or if we regard each degree as one mile the diameter would be 113 13-19 miles.

Now, regarding this as the diameter of our circle one half of it would be the radius, viz: 56° 16-19 or if we regard each degree as one mile our radius would be 56 16-19 miles; hence the distance around the inscribed hexagon would be six times that amount either in degrees, miles, or any other system of measurements we may use—

$$\begin{array}{r} 56\ 16\text{-}19 \\ 6 \\ \hline 336 \\ 5\ 1\text{-}19 \\ \hline 341\ 1\text{-}19 \end{array} \qquad \begin{array}{r} 16 \\ 6 \\ \hline 11)96(5\ 1\text{-}49 \\ 95 \\ \hline 1 \end{array}$$

It is therefore determined that the periphery of an inscribed hexagon is 341° 1-19, or if we regard each degree as one mile, it would be 341 1-19 miles.

Now, if we subtract the periphery of the hexagon from the circumference, we will have the difference in whatever measure used

$$\begin{array}{r} 360^\circ \\ 341^\circ\ 1\text{-}19 \\ \hline 18^\circ\ 18\text{-}19 \end{array}$$

Thus we have the difference in degrees, 18° 18-19.

It is evident if we regard each degree as one mile, that the difference would be 18 18-19 miles.

Now we must bear in mind that the diameter of our circle is 113 13-19, or if we please 113 13-19 miles.

If then we divide this diameter by 6 we will observe that our quotient will be 18° 18-19, or 18 18-18 miles, which is precisely the same as the difference between the periphery of the hexagon and the circumference of the circle, viz:

$$113^\circ\ 13\text{-}19 \div 6 = 18^\circ\ 18\text{-}19$$

Of course if we add the difference between the hexagon and the circumference, to the hexagon we will have the circumference, viz:

$$\begin{array}{r} 341^\circ\ 1\text{-}19 \\ 18^\circ\ 18\text{-}19 \\ \hline 360^\circ \end{array}$$

Since, however, one-sixth of the diameter is precisely equal to the difference between the periphery of the hexagon and the circumference, we necessarily have the rule when the diameter is given to find the circumference.

Multiply one half of the diameter by six, to which add one-sixth of the diameter.

$$\mathrm{R} \times 6 = \mathrm{Hex.\ and\ Hex.} + \frac{\mathrm{D}}{6} = \mathrm{C}$$

Or we may have it thus:

Multiply the diameter by three and one-sixth.

It thus appears that the diameter of every circle is 6-19 of the circumference, and the periphery of every inscribed hexagon is exactly 18-19 of the circumference. This may be practically demonstrated by any mechanic or artizan.

This is one of many theorems that follow, wherein I must say that I can discover no error. Some one will say, perhaps, that the weight of authority is against me. So was the weight of authority against Galileo, but that proves nothing.

Let some one, either mathematically or practically, show my conclusions to be erroneous. If correct, all of our astronomical calculations are erroneous. The French metric system is incorrect—even a barrel, or steam boiler, has more capacity than is attributed by our present calculations. Respectfully,

J. E. Wallace.

P.S.—I submit the enclosed demonstration with reluctance, because of the dogmatism of many of our unthinking would-Be scientists. I am, however, fully certain, both mathematically and mechanically, of the truth of my position.

The inductions by which this result has been attained, are by far too abstruce for ordinary readers. I have, therefore, so simplified the operation, as to place the truth within the comprehension of the most ordinary mathematical minds.

The deductions flowing from the main theorem are necessarily somewhat startling to those firmly anchored on old geometrical doctrines. I shall, therefore, expect but few such to look with favor upon a very simple demonstration like this.

At some future time I may call your attention to some chemical facts and inductions of paramount importance. I at present, however, simply desire to place this matter before the world, and say, that upon this fundamental truth hangs the key to a universal metric system, which our government should take the initiative in adopting.

Our present calculations in the measurement of spheres, cylinders, cones, etc., all require revision.

J. E. Wallace.

Naphthaline.

Newport, R. I., September 6, 1873.

Mr. Editor: The solution of the naphthaline difficulty seems to make but slow progress, whether owing to the erratic character of the trouble, or to the fact that the solution has not been earnestly and persistently undertaken. Its eccentricities in suddenly appearing in out of the way places, dedicated as byways and highways of the gas, the persistent and obstinate nature of its obstruction, its furtive and vagabond character, that seems to elude acquaintance and shun recognition, constitute it the perpetual menace of an unseen enemy, and demonstrate the necessity of learning more intimately the conditions which govern its production and deposit.

Its production seems to be in a great measure the peculiarity of clay retorts, and hence is the result of some action of clays that does not obtain in iron retorts. When a charge of coal is placed in a highly-heated clay retort the first evolution of the gas is very rapid, resulting from the acquired heat of the retort. But this very rapid evolution of the gas reduces the interior heat of the retort very rapidly, and before the heat from the furnace can react through the thick non-conducting sides of the clays, the conditions of the interior are very favorable for the production of the heavy carburets of hydrogen including naphthaline. The impetus given to the evolution of the gases from the coal by the fierce heat of the freshly charged retort is not lost, until some time after the interior is so deadened, that the remaining heat is insufficient to thoroughly decompose the gases produced, so as to make the commercial article we want to deliver to our consumers.

But as the heat fails the evolution grows less, and the heat from the exterior begins to assert itself. Very soon an equilibrium is restored; that is, the furnace heat is transmitted through the sides of the retort, and the evolution of gas increases; its rapidity of production depending, not as at first upon the degree of heat which the retort had acquired, but on the amount of heat which can be made to penetrate the sides of the clay, The contest between the production and conduction of heat to the interior of the retort, and its absorption by evaporation of the gases from the coal is now equal, and the conditions thenceforth are favorable to the manufacture of permanent and reliable gas.

No such condition is possible with an iron retort. The moment it feels the cooling of a fresh charge of coal, its thin and conducting material restores the lost heat promptly from the furnace. The equilibrium of application and absorption of heat is never lost in an iron retort, or at best only for a brief moment; and consequently the chances for the production of of such a fat hydrocarbon as naphthaline are very slim.

The remedy for such a condition is to shorten the period during which the heat of the furnace is overcoming the sudden cooling of the interior of the retort. This would seem to suggest the advisability of removing all shield and guard tile from around the retorts, except such as experience shows to be necessary to their safety and durability. But this only tends to *loosen* not to prevent the production of naphthaline, and hence it must be looked to and looked further along among the processes of cooling and cleansing.

The conditians of its deposit are not very well determined. In its progress through the works, traces of it may be seen at almost any point, but more particularly after the gas has become pretty well cleaned. A copious shower of cold water, just as the gas enters or emerges from the condensers, seems to be very healthy for naphthaline, and frequently develops it strong and abundant. On the contrary, its introduction to a small quantity of water impregnated with ammonia, immediately after leaving the condenser, seems to check its tendency to deposit. An ordinary scrubber into which the gas enters at the bottom and meets the water in small quantity, trickling down over broken surfaces, answers very well. The ammonia furnishing the alkali, and the super-carburet the fat, a substance is produced which has a saponaceous appearance, and dissolves readily in water.

If members of the fraternity who are troubled with naphthaline will study closely *all* the conditions of its

production and deposit, as far as possible, and communicate them to the JOURNAL, we could compare notes, and be on the high road to positive knowledge on the subject. W. A. S.

Carbon in Retorts.

SENECA FALLS, N. Y., August 23, 1873.

Mr. Editor: Finding a large quantity of black dust, or carbon, inside of small retort "using crude petroleum," in a portable works, I thought I would write for information about getting rid of it. It hinders the heating of the retort, and I do not get as much gas when a good deal of that carbon is in the retort, as when the retort is clean on first starting. I think the carbon should be all turned into gas. And I propose to build a small portable works, using crude petroleum, and forcing into the retort with the petroleum a certain portion of *air*, believing I will get rid of all solid carbon, and much more gas from a given quantity of petroleum. I also propose to use coal tar in the same manner, believing it can be done with the injection into the retort of *air*.

Has the injection of air into the retort with the material to make gas, ever been tried, or am I the original proposer? Will you please give me your opinion of the thing proposed. Also, would any danger arise from explosion of the introduction of air?

What proportion of air could I safely inject?

Would gas companies be gainers if they could convert tar into gas; and would not the gas be of better quality, if tar was all converted into gas? And will not the injection of air with the tar overcome all the difficulties heretofore experienced in making gas from coal tar? Yours respectfully,

W. W. BINNEY.

Enrichment of Coal Gas.

"TITUSVILLE HERALD,"

TITUSVILLE, PA., August 20, 1873.

Professor HENRY WURTZ.

Dear Sir: We noticed favorably your article on enriching coal gas (see copy of *Herald* which we have sent you). The subject is one of some importance to the people of this region, and you will confer a great favor if you have the data at hand, by sending us a list of the gas companies of the United States; also those which belong to the Association, the amount of coal they annually consume, and the probable percentage of petroleum which could be used to advantage. We have an immense surplus of petroleum here at present, and no better time could be fixed upon for a united concert of action on the part of the gas companies, for adopting your suggestions, and purchasing the crude material at a low figure. There is unmistakable evidence that the article is practically inexhaustible, and there need be no apprehension of a scarcity in the future.

Yours very respectfully,

JOHN PONTON,

Assistant Editor *Herald*.

[The points of information above desired are in process of collection, but far from being yet in a condition for publication, and the undersigned cannot therefore oblige Mr. Ponton, as he regrets to say.—HENRY WURTZ.]

Burning Tar as Fuel.

Mr. Editor: Feeling a deep interest in whatever affects the prosperity of gas works, I send you the following which may be of interest to some of the fraternity:

For fifteen months past we have been successfully burning the tar made at our works, under our retorts, and find a handsome profit by so doing.

We find that every gallon of tar, is worth as fuel, under the retorts, about two thirds of a bushel of coke, and, in addition to that, the make of gas is two to three tenths of a f ot more, per pound of coal, while burning tar than when using coke. This last we believe to be owing to the high and steady heat produced by the uniform tar fire.

Every gas works large and small, and especially the small works, have an interest in utilizing the tar made to the best advantage. Some companies may have a sale for tar at a price as good—or better—than burning it under their retorts, with the benefits above mentioned. Others have little or no use for it and find it a nuisance, while every company has sale for all the coke they can make. It cost us about $50 to fit up with the proper appliances for burning tar, with the results above mentioned; and, for the same expense, every gas company, large or small, may do the same. Respectfully yours,

CHAS. NETTLETON, Pres. East Chester Gas Co.,

117 Broadway, N. Y. city.

Products of the Destructive Distillation of Lignite.

BY B. NIEDERSTADT.

The lignites examined came from the Rhenish-Hessian basis. 1. Lignite from Meissuer, of a red-brown color and woody texture; spec. gravity 1·12. 2. Lignite from Rheinhardswalde, grey or black, containing abundance of resin: spec. gravity, 1·13. 3. Brilliant lignite of Meissner, black, fracture fibrous, lustre vitrous; spec. gravity, 1·32. 4. Lignite of Hirschberg, brownish-black, in tree-like masses: spec. gravity, 1·35. The following is their elementary composition:

	1.	2.	3.	4.
Carbon	51·238	58·782	69·995	60·302
Hydrogen	4·169	4·042	3·192	4·859
Oxygen	32·326	20·803	17·591	20·169
Nitrogen	0·175	0·150	0·123	0·121
Ash	0·795	5·940	5·470	3·167
Moisture	10·297	10·283	3·629	11.391

On distillation these lignites yield solid, liquid, and gaseous products; at a dark-red heat, a brown tarry matter passes over along with combustible gases. To separate the watery portion from the tar, common salt is added to the mixture, heated to 40°. The quantity of tar, when fed from water, amounts to 4 to 5 per cent., and the watery products 43 to 55 per cent., containing acetic acid and ammonia. The oily matters distil over at 95° to 220°, leaving a black pitchy residue. The distillate, on agitation with concentrated soda-lye, yields phenol. On fractional distillation, the portions passing over up to 150°, contain pyrrol and picoline, which boils at 105°, and is distinguished from aniline by not giving a violet coloration with chloride of lime. The part passing over about 220° solidified on cooling, yielding a crystalline mass soluble in alcohol and ether. It melts at 49° to 51°, and is a paraffine formed of hydrocarbons $C^n H^{2n}$. It amounts to 1 per cent. of the lignite employed. The gaseous mixture, from the Meissner lignite, consists of: Hydrogen, 14·26; carbonic oxide, 40·12; marsh gas, 10·29; nitrogen, 4·09; carbonic acid, 2·10; ethylene and superior hydrocarbons, 2·13. There appears, consequently, little prospect of using the gases from lignite for lighting purposes.—*Engineer and Mining Journal.*

PRICES OF FOREIGN AND DOMESTIC GAS COALS.

[Reported Expressly for this Journal.]

SEPTEMBER 16, 1873.

DELIVERED IN NEW YORK.

English Cannel.

Ince Hall	$17 00	@	18 00
Kirkless Hall	16 50	@	17 00

English Caking Coals.

Newcastle Gas	$12 00	@	00 00
Liverpool caking	11 50	@	12 00

British Province Coals.

International—At Sydney, $2 50 in gold			— —
Block House—At Mines, $2 50, Gold			0 00
Little Glace Bay—At Mines, 2 50 Gold			— —

Pennsylvania Coals.

Penn Gas Coal—At Amooy	$8 50	@	0 00
Westmoreland—At Amboy	8 50	@	0 00
(In New York both the above coals $9 10)			
Shafton	9 10	@	0 00
Youghiogheny—At Baltimore	7 50	@	0 00

West Virginia Coals.

MurphyRun	$7 50	@	8 75
Despard—At Baltimore	6 30	@	0 00
West Fairmont	8 60	@	0 00
American Gas Coal	8 50	@	0 00
Fairmont	8 50	@	0 00
Newburgh Orrel	8 50	@	0 00
Pinnickinick	8 50	@	8 75
Cloverhill of Virginia	6 75	@	7 00
McKenzie Compound Mixture			— —

American Cannel Coals.

Peytona of West Virginia	$15 50	@	00 00
Darlington of Pennsylvania			— —
American Cannel	$14 00	@	00 00

Asphaltes.

Albertite of New Brunswick	$— 00	@	— 00
Ritchie Mineral of West Virginia	20 00	at Balt'e.	
Trinidad Bitumen	— —	@	14 50

MIDDLETOWN

Tube and Iron Co.

MANUFACTURERS OF

Wrought Iron Pipe

For Gas, Steam, Water, Etc.

WORKS—MIDDLETOWN, PENN'A.

OFFICE—228½ WALNUT ST., ROOM 2, PHIL'A.

THOMAS R. BROWN, President.
JOS. H. LANDIS, Sec'y and Treas'r.
335-1y WILLIAM H. BRINES, Sup't.

S. DECATUR SMITH,

SUCCESSOR TO

SMITH & ELLIS.

CAST IRON GAS & WATER PIPE,

FOUNDRY COR. OF YORK AND MOYER STS,

Philadelphia.

Several Thousand 3, 4 and 6 inch Cast Iron GAS and WATER PIPES on hand, for immediate delivery.

☞ Fittings for Gas and Water Mains.

319-1y

B. S. BENSON.

MANUFACTURER OF

Cast Iron Pipes and Fittings,

AND

Gas and Water Mains.

All sizes from 3 to 30 inch cast vertically in 12½ feet lengths

Office & Factory 52 East Monument St.,

BALTIMORE, MD.

JOHN McNEAL & SONS,

MANUFACTURERS OF

Cast Iron Gas and Water Pipe.

Works—Burlington, N. J.

Having withdrawn from the firm of R. D. Wood & Co., the practical management of which we have had since the organization of that firm until June 1871, we have now completed our Works for the manufacture of CAST IRON PIPE and Castings generally.

Having immediate rail and water communication with New York and Philadelphia, as well as the coal and iron regions we have every advantage of situation.

Our experience in the manufacture of Pipe for a great many years, has enabled us in rebuilding to practically apply Machinery and Fixtures of the very best character, to insure *good work*.

We are now prepared to contract for this class of Castings under the most favorable terms.

New York Office 117 Broadway.

THE AMERICAN
GAS-LIGHT JOURNAL AND CHEMICAL REPERTORY.
Publishing Office, No 42 Pine Street.

PUBLISHED ON THE 2ND AND 16TH OF EACH MONTH
At No. 42 Pine Street, New York.

A. M. CALLENDER & CO.,
PROPRIETORS.

EDITOR---PROF. HENRY WURTZ.
Sec'y of the Gas-Light Association of the U.S.
Editor's Private Office, 12 Hudson Terrace, Hoboken, N. J.
(Immediately fronting the Ferry Houses.)

This is a recognized official organ of—
LIGHT, HEAT, MINING INTERESTS, STEAM, WATER-SUPPLY, PATENTED INVENTIONS, VENTILATION, SANITARY IMPOVEMENT, AND GENERAL CHEMICAL SCIENCE.

TERMS:
SUBSCRIPTION—Three Dollars per annum, in advance.

AGENTS:
NEW YORK—AMERICAN NEWS COMPANY, 119 and 121 Nassau St
BOSTON—S. M. PETTENGILL & Co., 6 State Street.
PHILADELPHIA—COE, WETHERILL & Co., Ledger Buildings, Phila.
Germany—B. WESTERMANN & Co., of New York.
Great Britain—TRUBNER & Co., 60 Paternoster Row, London.

☞ All communications to be addressed to "THE EDITOR, No. 42 Pine Street, Room 18, New York.

TUESDAY, SEPTEMBER 16, 1873.

WISHING TO MAKE THIS JOURNAL an organ of intelligent discussion to those of our readers who may wish to gain or give information on the subjects to which its columns are devoted, the publishers solicit letters from all among them who make the study of these subjects a pleasure, or a profession.

Subscribers would confer a favor upon us by remitting *CHECKS*, or *POST OFFICE MONEY ORDERS*, as we are frequent losers where money is enclosed in letters.

☞ NEWS AGENCY.—The American News Company, 11 and 121 Nassau street, New York agents for this Journal. News dealers will please send orders to them.

NOTICE.

☞ *All Collections for Advertisements, Subscriptions, etc., are made directly from this Office. We have Agents to solicit the same, but they are not authorized to Receipt for Money.*

TO OUR SUBSCRIBERS AND PATRONS.

In making remittances for subscriptions, always procure a draft on New York, or a POST OFFICE MONEY ORDER, if possible. Where neither of these can be procured, send the money, but always in a REGISTERED LETTER. The registration fee has been reduced to fifteen cents, and the registration system has been found by the postal authorities to be virtually an absolute protection against losses by mail. ALL Postmasters are obliged to register letters whenever requested to do so.

CONTENTS.

☞ An asterisk (*) denotes an illustrated article.

*Stoking by Machinery 95
Chemical Excerpts 96
British Association of Gas Managers (continued) 97
Tennessee Oil Lands 97
Prof. Silliman's Report of Water Supply of Norwich, Conn. 89
Trial of the New Electric Light Machinery at the House of Commons 99
Two Dollars per Barrel for Oil 99
The Coming Pavement 99

CORRESPONDENCE—
A Circular Subject 100
Naphthaline 100
Carbon in Retorts 101
Enrichment of Coal Gas 101
Burning Tar as Fuel 101
Products of the Destructive Distillation of Liguites 101

EDITORIALS—
Stoking by Machinery 102
American River Pollution 102
Petroleum-Gas 102
A Queer Petroleum Accident 130

STOKING BY MACHINERY.

ALONZO F. HAVEN'S INVENTION.

In our issue of July 16, 1873, we began to insert some elaborate accounts of plans which either are now in use, or have been proposed, for applying the power of steam, instead of human muscle, to the arduous task of charging gas retorts—a species of work which has to be done with the regularity of clock work, to ensure success, involving also great exposure to high temperatures; and which therefore appears to call for the aid of the inventor as sternly as the somewhat kindred art of the iron puddler. Remarks have also been made by us on the difficulties of realization of this problem in *economical* practice.

The invention presented in this number by Alonzo F. Havens, late Engineer of the Brooklyn Gas-Light Company, marks our next step, in exposition of this subject; and a most important step it is.

Mr. Havens's experience in the retort house itself, has qualified him to attack the problem with both knowledge and power. His aim has been to combine efficiency with *simplicity*.

His apparatus on a working scale has now been in operation in Brooklyn for several months past. It never fails in its operation, never exhausts its energy, and although capable of doing the work of forty men, has never yet, as we learn from the inventor, asked for higher wages or less time, nor has the heat of the past summer troubled it in the least. It deposits in a retort all the coal the latter can hold, and seems to do this in a manner not to be approached by hand. As now constructed it has put 400 lbs. of coal into a retort, spreading it evenly over the bottom all the way to the extreme rear. It then returns to its bed, ready for a fresh charge, in ten seconds. Its inventor's study, he says, has been to make a machine for existing gas-works, avoiding any necessity of alteration of existing benches or other plant. He claims also, very justly, that there should be a machine which is adaptable even to small works; as regards cheapness, and lack of necessity of employment of a special machinist. Other points he makes are that such a machine should be light enough to avoid danger of breaking through the floor of a retort house which has a cellar, and that it should not take up or require more room than the men, with their hand scoops, that will be supplemented by it.

His machine, he suggests to us, will exact none of the privileges to which human machines are addicted. Decent treatment will suffice for it; and it will be always ready, night and day, for any emergency. The body and soul of a superintendent will have less wear and tear. Mr. Havens's recent *striking* experience will account, to our readers, for these hearty suggestions of his, and doubtless give us also an insight into his motives in turning his attention to this subject.

It is a well-recognized principle that to accomplish hand-work, particularly of this class, by machinery, complexity must be avoided as much as possible. For every day routine work, which *must not* be subject to interruption, something reliable must be had. Complex machines are notoriously unreliable. Combinations of mechanical devices; screws, pinions, cams, cogs, worms, chains, etc., etc., if multiplied, will become even less reliable than the human nerve and muscle. We think we do not err in believing that Mr. Havens has worked in the right direction here, and that his work is good.

There is much more to be said about Mr. Havens's fine invention, which must be seen in operation, as we have seen it, to be fully appreciated; but space fails now.

The machine we understand is on exhibition at the present Fair of the American Institute, by the American Gas Works Construction and Supply Company, of No. 61 Broadway, New York, of which Mr. Havens is Engineer.

AMERICAN "RIVER-POLLUTION"

We have heard that a wise man of old (not very old, except that Time, and every thing else, moves now by steam and electricity) said once that he "didn't want any [of *that* in his'n," probably. Now this remark, though probably less elegant than that of the older and more famous wise man who said "know thyself," may prove not less difficult to carry out in practice.

Let us ponder. The sink of all the pollution of mankind (and other kind,) is the great Ocean, that flows round all the Continents. These impurities no doubt constitute the natural nourishment of monsters engendered in its bosom. We beg their pardon for the epithet, as we do not know that they are any more monstrous than mankind, certainly in a moral point of view. "Devil-Fish", however, supposed by some to have been invented by Victor Hugo, are well known to all naturalists. It remains to be seen whether the human brain is to be allowed to find out all the wonders of the great deep. It is certain that we shall never know all, for that would be Omniscience.

At any rate *that* is the place provided by Nature as a receptacle for the effete discharging from the land. The question has lately arisen in this country, as some years since among older nations, whether rivers shall carry these impuri- from one one town, to be pumped up again and distributed, even in highly diluted form, to the people of another town. We think not. Our own brains, weak though we confess them, cannot retain the idea of such a manifest violation of nature's laws. The suggestion is therefore thrown out and urged, that other men's brains should ponder over this subject here in this country, as of late in Europe. The subject is ponderous. (No pun is meant.)

Our own thinking over it, both in the darkness of the night, and in the brightness of the light, has been that it is better that everything about us should be remodeled, cost what it may; than that we should run such risks. Cleanliness is admitted to be next unto Godliness. Let us, if it may be done, secure cleanliness and purity, first in body, and possibly then in soul.

Pollution of public wells is another subject we have something to say about, and to prove about.

PETROLEUM-GAS.

This subject has occupied our thoughts somewhat, of late, as our readers will have observed. The *National Oil Journal*, of Pittsburgh; which now comes to us regularly, appears to appreciate and to support ably the idea that gas made from *crude* petroleum is to be the enricher of the future. There is enough petroleum, and possibly to spare, for all *this*, though it is absurd to suggest or to dream that it is going to supplant, or even to become a rival, except throughout limited districts, to coal, as a gas-producing agent.

The point we are going now, however, to put before the gas fraternity, is one worthy of their attentive consideration. The excessive cheap-

ness of crude leads to a corresponding cheapness of refined petroleum. This fact is already having its influence locally, we hear, on the *profit* (see another note on this page) of some companies. The cheapness is an inducement to some gas consumers to adopt petroleum-lamps, and this is a movement that seems likely to increase. It looks as if gas-producers ought to combine with oil-producers, to prevent petroleum from becoming a "drug in the market." This they can plainly do, as we think we plainly see, by buying the crude petroleum and selling it again, in another form, to gas-consumers. If either the gas, or the oil-producers, will *find out the best way* to put it into this other form, with a view to the profits, it seems to us that the thing is clearly before us. Such a result would cut several ways. The people, the gas companies, and the oil-prodncers would benefit. Speculators, and, we regret to say, makers of petroleum lamps, would suffer.

A QUEER PETROLEUM ACCIDENT.

A late article on the subject of "Petroleum Gas as an Enricher," which was thrown out without much consideration, has received some attention in other quarters, having been copied into journals in the "oil regions" and elsewhere. The Titusville *Herald* copies it, but very accidentally omits *one word*, a word italicised by us, for the reason that to the gas profession it was the point of the whole article. This word was *profits*.

Now what we want to add, or rather to repeat here, is that the *profits* (we again italicize) are the main thing to be investigated. An eminent member of the Gas Fraternity lately wrote to us as follows :

"The illuminating element is so strong in petroleum, that it will be utilized sooner or later. I doubt if the best method has yet been discovered. Patience and real scientific research will bring it out finally." These are words of wisdom.

BENCHES & SKELETONS BUILT

AND

CLAY AND IRON RETORTS SET,

For Gas Works,

BY HENRY L. THOMAS,

342-1oct-6m 2148 North Second Street, Phil'a, Pa.

WANTED—A SITUATION AS SUPERINTENDENT of a Gas Works. Is thoroughly acquainted with the manufacture of gas in all its branches. Reference as to capability, etc., can be had from his late employer. Address, CARROL COLLINS, 310 Monroe Street, Peoria, Ill. 342-1t

TO GAS COMPANIES.

A PRACTICAL AND SCIENTIFIC ENGINEER AND Superintendent desires a re-engagement. Thoroughly understands his busines, has ten years experience and has good habits. References as to character and ability to well-known Engineers. Address S. P., care of J. L., Register, 828 Chestnut St., Philadelphia.

TO THE PROFESSION.

SITUATION WANTED by a young man who understands the repairing of Gas Meters, erecting Street Lamps, Gas Fitting, and how to take the statement of Meters. He is capable of taking charge of a small Gas Works. Has had six years experience in the business. Addres, J. T. WHEELER, Indianapolis, Ind., care of JOHNSON, BROS.

TO GAS ENGINEERS—A YOUNG MAN of liberal education, who has served atGas-fitting, Laying Street Mains, Setting Lamp Posts, Setting Retorts, and all the daily duties of a large Gas Works, wishes a situation with an active Builder of Gas Works, to learn the profession in all its branches. Is willing to work and anxious to learn. Address C. L., care of Dr. Wm. M. Murphy, 69 West Seventh Street, Cincinnati, Ohio.

A SYNOPSIS OF

British Gas-Lighting.

Imperial 8vo. 950 pp. and over 200 Illustrations.

Now in Press, and to be issued November, 1873.

COMPILED BY

JAMES R. SMEDBERG,

Consulting Engineer San Francisco (Cal.) Gas-Light Comp'y.

This work comprises the essence of the *London Journal of Gas-Lighting*, from February 10th, 1849, to December 31st, 1868, with the monographs read before the British and North British Associations of Gas Managers, between the latter date and November 1st, 1873. There are also added essays written expressly for the "Synopsis," upon DISTRIBUTION, by two distinguished engineers; and a Zincograph of the latest form of that valuable contribution to the Art, **the Sabbaton Multitubular Condenser.**

Its frontispiece is an engraving, with portraits and autographs of the late Thomas G. Barlow, Esq. *fons purissima doctrinæ*, and Editor of the original series; and of the late Jos. A. Sabbaton, Esq., the best type of the American Engineer.

The whole is, by permission, dedicated to CHAS. ROOME, Esq., as Head of American Gas-Lighting.

Part I. (700 pages and 170 illustrations,) sets forth the whole argument of Gas Lighting. Part II. (240 pages and 35 illustrations,) gives abstracts of 900 patents, in this art and its allied industries. It is the most complete practical compend ever projected, and its typography will satisfy the most critical reader.

Price, cloth.....$15.00.

One hundred copies, first proofs, printed upon heavy paper, and finely bound in half Russia, are offered at $25 each. To secure these, early application is necessary.

As the work is not stereotyped, it will soon be out of print.

Pages are reserved for the cards of European and American manufacturers, at $37.50 for each quarter page occupied. No smaller card is admitted. Cash remittances must accompany every order for advertising. Where desired, cuts will be furnished at cost.

The compiler and his publishing agent will jointly guarantee the return of all remittances upon the 1st of February, 1874, in default of publication by that date.

It is hoped that every manufacturer will be represented by an illustrated card.

Advertisements cannot be received later than November 1st. They will be inserted in the order of date of their reception.

All communications relating to the SYNOPSIS OF BRITISH GAS LIGHTING, must be addressed

JAMES R. SMEDBERG,
Consulting Engineer, Etc., San Francisco, Cal., U. S.

This work is endorsed by officers of the following American Gas Companies:

Manhattan, N. Y. City.	Cincinnati, Cincinnati, O.
Metropolitan, N. Y. City.	San Francisco, Cal.
New York, N. Y. City.	New Orleans, N. O., La.
Brooklyn, Brooklyn, N. Y.	Jersey City, Jersey City, N J.
St. Louis, St. Louis, Mo.	Memphis, Memphis, Tenn.
Louisville, Louisville, Ky.	Philadelphia, Phil'a, Pa.
Boston, Boston, Mass.	Washington, Wash'n, D. C.
Baltimore, Baltimore, Md.	Chicago, Chicago, Ill.

And supported by the subscriptions of over three hundred others. 341

JUST PUBLISHED.

THE GAS CONSUMERS MANUAL,

OR

How to Obtain Cheap Gas and Good Light,

Being a popular exposition of the Chemical Properties of Coal Gas, with descriptions and illustrations of the most improved Burners and Globes, and the best methods of Treating and Burning Gas for Lighting, Cooking and Heating.

Also, directions to enable Consumers to read the Indices of their Meters.

By E. S. Cathels, C. E.,

Ass. Inst. C. E., England
Member Brit. Asso. Gas Managers, Etc.,

339-6t Montreal, Conada.

☞ Parties wishing copies, through the States, can be supplied from this office.

FOR SALE.—TWO IRON TRUSS RETORT HOUSE Roofs, with Ventilators, complete; as good as new. One of them will cover a building 28 feet by about 75 feet; the other 30 feet by 45 feet or 50 feet, all in the clear. For further particulars address F. A. SABBATON,

341-tf Sup't Troy Gas-Light Co., N. Y.

SITUATION WANTED by a Gas Engineer who has had much experience in erecting and altering gas works, and thoroughly acquainted with the manufacture of gas in all its branches. Is willing and able to work. Can furnish best of references as to capability, etc. Address ENGINEER office of this Journal.

TO GAS COMPANIES.

A GERMAN GAS ENGINEER, WHO FOR SEVERAL years had charge of a Works in Europe with about fifty million feet annual production, and who has been connected with one of the largest Works in this country, wants employment as Superintendent or Assistant. Is a strict Disciplinarian, and offers the best references. Address V. H., care JAMES KIDD, Esq., 118 Malden Lane, N. Y. 338

AMERICAN

GAS WORKS

CONSTRUCTION

AND

Supply Company.

ORGANIZED UNDER THE GENERAL LAWS OF THE STAT OF NEW YORK FOR THE FORMATION OF CORPORATIONS.

TRUSTEES.

JAS. A. TAYLOR, President. (Firm of Wm. Taylor and Sons, Columbian Iron Works, Brooklyn, N. Y.)

WILLIAM DURYEA, Vice President, (Glen Cove Starch Company.)

NORMAN C. MILLER, Treasurer.

ALONZO F. HAVENS, Engineer, (late Engineer and Superintendent Brooklyn Gas Co.)

THOMAS P. SCULLY, Secretary.

CORNELIUS H. DELAMETER, (Delameter Iron Works, New York.)

WILLIAM MURDOCH, (Supt. of Sales.)

This Company is now prepared to construct Gas Works complete, and to equip both new and old Works with the latest and most approved apparatus and labor saving devices, also to furnish Retorts, Coal and all other Gas Works Supplies.

The valuable patents granted to Alonzo F. Havens, which are destined to enter into the Construction of New Gas Works, and are also so adapted as to be applied to existing works, resulting in great economy in their working are owned by this Company.

Gas Engineers can fully appreciate their advantages, reducing as they will, the first cost of new Works, and increasing the capacity of old ones, with little outlay, or any interruption of manufacture, and resulting in a large future saving of working expenses, with an increase of product.

Estimates of new construction or alterations furnished.

For more full particulars, and for descriptive circulars of Mr. Havens's appliances, and other information, address,

AMERICAN

GAS WORKS

CONSTRUCTION

AND

Supply Company.

No 61 Broadway, N. Y.

SMITH & SAYRE MANUFACTURING COMPANY.

The Mackenzie Patent Gas Exhauster

And Patent Compensator.

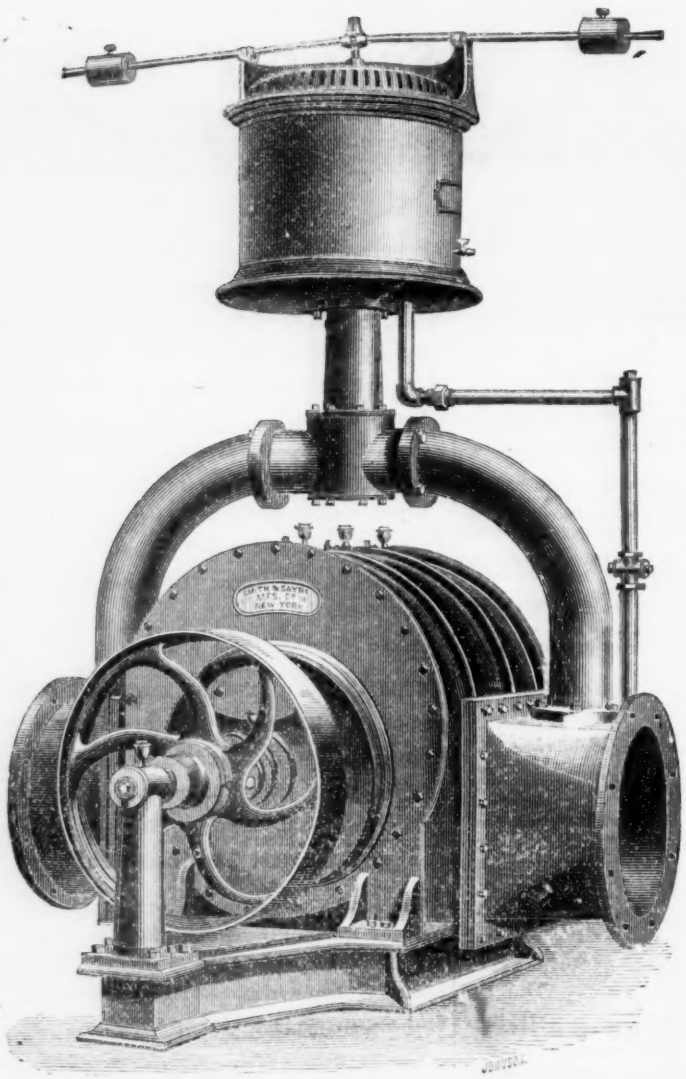

They are made to pass from 4,000 to 150,000 cubic feet of gas per hour; will increase the production and illuminating power of the gas, and add very much to the durability of the retorts, either clay or iron. The Compensator obviates entirely the necessity of water-joints, is compact, durable, cleanly, not liable to get out of order, self-acting, quiet, and certain in its operation.

We are also sole proprietors and manufacturers of the

MACKENZIE PATENT BLOWER, PATENT CUPOLA AND SMELTING FURNACE.

The Blower is a Force Blast machine, durably built, and can be driven with one-third the power required to drive the ordinary Fan.

The Cupolas are manufactured in sizes to melt from 1 to 90 tons per hour, will save one quarter of the time required by the old style Cupola, and 33 per cent fuel. Address

G. G. PORTER, President.

JAMES M. SAYRE, Treasurer.

OFFICE, 95 LIBERTY STREET, New York.

CHARLES W. ISRELL, Secretary.

AMERICAN

GAS SCREEN MAN'F'G COMPANY.

TO GAS-LIGHT COMPANIES.

Your attention is respectfully called to the GAS SCREEN now being manufactured by the American Gas Screen Manufacturing Company, under the patents granted to E. DUFFEE, and are pleased to submit the following points of their excellence and superiority over all other screens now in use.

The Screen is made with an oak frame, interlaced with split rattan, drawn through holes at regular intervals in the Frame and cross-pieces, the edges of the frame being grooved prevent abrasion.

The advantages of the screen are:

1st. The large purifying surface, the construction of the Screen giving over three-fourths of the surface for the gas to penetrate the lime.

2d. On account of the free passage of the gas through the creen the pressure is reduced, thereby preventing the accumulating of carbon on the retorts.

The saving of lime and labor, as the Screens are not to clog, and are easily cleaned.

Their cheapness and simplicity of construction.

5th. Their DURABILITY—they can be used longer than any her now used.

Testimonials.

PROVIDENCE, RHODE ISLAND, March 21st, 1872

E. DUFFFE, Esq., Agent, etc.

Dear Sir: The Trays manufactured by you for our West Station were put in use in September last, and have *given perfect satisfaction.*

The frames are well put together, and I see no reason why ey will not last for a long time. The *very large amount of n space* in these Trays gives the gas an easy passage, and brings it into contact with the lime much better than when the space is so contracted, as is the case in most of the other Trays in use.

The pressure thrown upon the retorts by contracted passages is very great, and were gauges used more frequently than they now are in many gas-works, this facat of having *open Trays* would become more apparent to mangers of gas works. The digerence in pressure at this station in passing the gas through your purifiers, is two-tenths (2-10) inches.

The amount of gas purified, per bushel of lime used to this date, is six thousand five hundred and fifty six (6,556) cubic feet.

Respectfully yonrs,
JAMES H. ARMINGTON, Supt.

BOSTON GAS-LIGHT CO., Dec. 1871.

Dear Sir: In answer to your inquiry how we like your Patent Tray for dry gas purifiers, I take pleasure in saying we have used them exclusive of all others, for the last three years, and think them far ahead of any yet offered. The surface being nearly three times that of any other Tray, and their lightness and durability perfectly satisfactory.

Yours respedtfully,
A. M. GILES.

EDWARD DUFFEE, Esq.

EAST BOSTON, JUNE 15, 1871.

Gentlemen: We have used your Screens some five years. They give perfect satisfaction.

I consider them *by far the best Screen* for Dry Lime Purifiers I have seen. Yours truly, A. M. NORTON, Supt.

CHELSEA, May 1, 1871.

Mr. E. DUFFEE.

We are using your Purifying Trays, and find them to be the *best of any* that I have used, and will *purify more gas with less pressure* than any tray that I know. I can fully recommend them, after four years trial, to any Gas Superintendent with perfect safety, as the *cheapest and best Tray made.*

Yours truly, JOHN ANDREW, Sup't.

DORCHESTER, March 3, 1870.

Mr. E. DUFFEE.

Dear Sir: We have had your Gas Trays in constant use for almost one year and six months and find them superior to any others we have ever used, both in point o economy and efficiency. Truly yours, W. B. BROOKS,
Agent Dorchester Gas-Light Co.

JAMAICA PLAINS, MASS., June 21, 1871.

EDWARD DUFFEE, ESQ.

Dear Sir; The Trays ordered by this company three years ago, are getting somewhat worn. I wish to say here that I consider your Trays to be superior to any yet invented, therefore please make us another set at the price named, to be like the sample shown in every way, and oblige Yours truly
JAMES F. ROGERS,
Sup't Jamaica Plains Gas-Light Co.

BROOKLINE, June 11, 1871.

E. DUFFEE, ESQ.

Dear Sir: You will please make a set of Gas Trays for this company as soon as convenient, at price named. In regard to the merits of the Tray, after having them in constant use for over two years, I will say that I consider them *superior to any Tray* manufactured in this country. Respectfully yours,
H. A. ALLYN,
Sup't Brookline Gas-Light Co.

BANGOR, August 2, 1870.

EDWARD DUFFEE, ESQ.

Dear Sir: Yours of the 20th ult. is received. In regard to your Gas Trays, I take pleasure in saying that they have been in use over two years, and have given perfect satisfaction and they are in good order at the present time; should have no hesitation in recommending them, believing they are the most durable and easiest kept in order of any with which I am acquainted. Respectfully yours,
W. H. PERRY, Sup't.

OFFICE OF THE SPRINGFIELD GAS-LIGHT CO.
SPRINGFIELD, MASS., Oct. 10, 1871.

Mr. WARD,
President Hartford Gas-Light Co.

Dear Sir: I have been using Gas Screens made by the American Gas Screen Company, for nearly a year, and find them superior in every way to the wooden Screens made and formerly used by the Springfield Gas-Light Co. I can purify more gas with the same quantity of lime, there being more surface to the Screens; and I consider them more durable, and recommend them to your consideration.

Yours with great respect,
GEORGE DWIGHT.

ROXBURY, June 14, 1872.

EDW. DUFFEE, ESQ.

Dear Sir: In answer to your inquiry regarding your Patent Gas Screens, I am happy to be able to say, that after nearly three years constant use we are perfectly satisfied with them being able to purify over fifty pet cent. more gas with them, than with any other Screen we have used.

Yours respectfully,
THOMAS J. PISHOU

OFFICE DETROIT GAS-LIGHT CO.,
DETROIT, MICH., April 22, 1872.

AMERICAN GAS SCREEN MANUFACTURING CO., HAVERHILL.

Gentlemen: The Screens bought of you work far better than any we have ever used. As a proof, we have with the same quantity of lime purified *twenty per cent.* more gas with your Screens than with any others, and the work well done. The workmen are also better pleased wifh them—they being light and handy to work. They also relieve the pressure very much upon the retorts, and I cheerfully give yau my experience.

Yours truly,
P. E. DEMILL. Secretary.

We give a list of some Gas-Light Companies using them.

Providence, R. I. Gas-Light Co., Boston, Mass. Gas-Light Co.: East Boston, Mass., Gas-Light Co.; South Boston, Mass. Gas-Light Co.; Springfield, Mass., Gas-Light Co.; New Bedford, Mass., Gas-Light Co.; Manchester, N. H., Gas-Light Co.; Reading, Penn., Gas-Light Co.; Biddeford, Me., Gas-Light Co.; Hartford, Conn., Gas-Light Co.: New Haven, Conn., Gas-Light Co.; New Orleans, La., Gas-Light Co.; Savannah, Ga., Gas-Light Co.; Charleston, S. C., Gas-Light Co.; Trenton, N. J., Gas-Light Co.; Charlestown, Mass., Gas-Light Co.; Dorchester, Mass., Gas-Light Co.; Chelsea, Mass., Gas-Light Co.; Baltimore, Md., Gas-Light Co.; Manhattan, N. Y., Gas-Light Co.; Cincinnati, Ohio.; Gas-Light Co.; San Francisco, Cal., Gas-Light Co.: Albany, N. Y., Gas-Light Co.; Sacramento, Cal.; St. Joseph, Mo., Gas-Light Co.; Leavenworth, Kansas, Gas-Light Co.; Macon, Ga., Gas-Light Co.; Roxbury, Mass., Gas-Light Co.; Lansinghburg, N. Y., Gas-Light Co.; Bridgeport, Conn., Gas-Light Co.; Stamford, Conn., Gas-Light Co.; Poughkeepsie, N. Y., Gss-Light Co; Scranton, Penn., Gas-Light Co.; Lewiston, Me., Gas-Light Co., and one hundred others.

Address **A. P. JAQUES, Treas.,**
Amer. Gas Screen Man'f'g Co., Haverhill, Mass

AGENCY FOR

GIBSON'S IMPROVEMENT

IN THE

Manufacture of Coal Gas,

42 PINE STREET, ROOM 18.

The undersigned having been appointed Special Agent for the introduction of GIBSON'S Substitute for Dip-Pipes in the Manufacture of Coal Gas, respectfully presents for the consideration of Gas-Light Companies the Circulars and Pamphlet issued by the American Coal Gas-Light Imp. Co., descriptive of the value of GIBSON'S Improvement, and the mode by which Gas-Light Companies can satisfy themselves of its usefulness, without trouble or expense, at their own works.

Orders for fitting up Valves of any desired form or patent, *subject to the generality of the Gibson claim*, and also for SUPPLIES and MATERIALS of every description required for the use of Gas Light Companies promptly attended to by

W. H. GRENELLE, Special Agent.

REFERENCE.—RICHARD MERRIFIELD, Esq., late Vice President MANHATTAN GAS-LIGHT COMPANY.

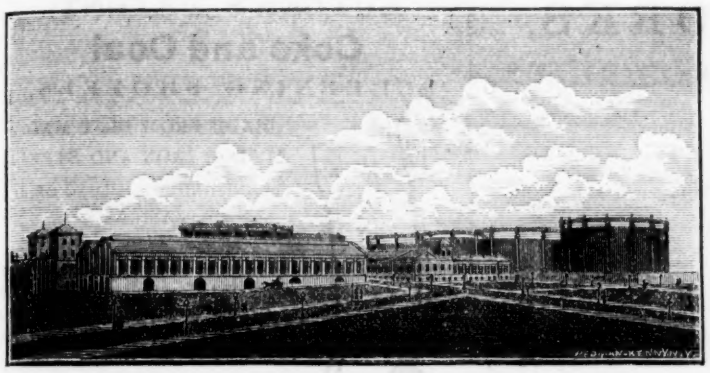

CINCINNATI GAS WORKS, ERECTED 1871-72-73.—WM. FARMER, ENG.

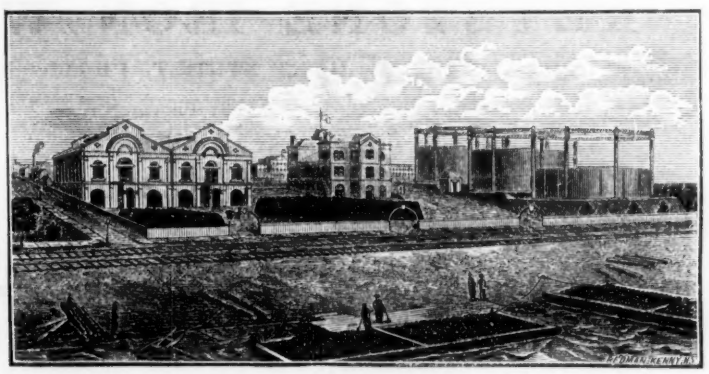

LACLEDE GAS WORKS, ERECTED 1872.—WM. FARMER, ENG.

WILLIAM FARMER,

ARCHITECT AND GENERAL GAS ENGINEER,

111 BROADWAY, TRINITY BUILDING, Room 95, New York.

WILLIAM FARMER may be consulted upon all matters connected with the construction of GAS WORKS, or any other description of buildings. Will furnish General and Detail Drawings, Specifications and Estimates for Gas Works of any capacity.

PATENTEE OF THE FOLLOWING INVENTIONS:

Exhausters for Gas and Foul Lime Ventilation,
Dumping Barrows for Coal, Coke and Lime,
Hydraulic Mains for Retort Benches,
Blowers for Forges, Foundries, &c.
Pumps for Water, &c., &c.

REFERENCES:

Professor SILLIMAN, New Haven, Conn.
GEN. CHAS. ROOME, President Manhattan Gas-Light Company, N. Y.
A. W. BENSON, President Brooklyn Gas-Light Company, Brooklyn, N. Y.
W. W. SCARBOROUGH, President Cincinnati Gas-Light Company, Cincinnati, Ohio.
S. L. HUSTED, President Laclede Gas-Light Company, St. Louis, Mo.
Prof. HENRY WURTZ, Editor AMERICAN GAS-LIGHT JOURNAL, N. Y.
GEN. A. HICKENLOOPER, Vice-President Cincinnati Gas-Light Co., Cincinnati, Ohio.
FREDERICK CROMWELL, Vice-President Laclede Gas-Light Company, St. Louis, Mo.
C. VANDERVOORT SMITH, Engineer Manhattan Gas-Light Company, N. Y.
JAMES R. SMEDBERG, Consulting Engineer, San Francisco Gas-Light Co., Cal. [342

GAS PURIFICATION.

St. John and Cartwright's
NEW IRON COMPOSITION

Has purified, per bushel, on a single test, 10,000 feet of Westmoreland Gas. With revivification lasts indefinitely. Surpasses in POWER and ECONOMY all known materials. Saves largely in FIRST COST, SPACE, LABOR, SUPERINTENDENCE, and all current expenses. Will purify *easily* sulphurous gas, wholly *unmanageable by lime.* Takes out *all the ammonia.* Now operating in the following Gas Works: Harlem, New York (21st street); Port Morris; Hunter's Point; East New York Worcester, Lynn and Cambridge, Mass.; Lewiston, Maine; St, Albans, Vt.; Pawtucket, R. I.; Meriden, Ct.; and being introduced in many other places.

Cost 70 cents per bushel. One bushel for each square foot of Purifier sufficient. Rights to use for life of Patents, for daily makes of gas in thousands; under 25,000 $200; under 50,000, $400; under 100,000, $500; $250 additional for each additional 50,000 per day.

For further information and instructions, apply to
ST. JOHN & CARTWRIGHT,
21st Street and Avenue A, New York Gas Works.

☞ Immediate arrangements are urged, as the demand for e prepared composition is increasing *so rapidly* that delays supply may occur.

CAUTION.

SEVERAL CONTRIVANCES HAVING BEEN DEVISED for the purpose of dispensing with the dip-pipe seal, by means of a valve, or cut-off, between the retort and the hydraulic main, in gas works, since this method of making gas was introduced by the AMERICAN COAL GAS LIGHT IMPROVEMENT COMPANY, all of which are infringements upon Letters Patent, numbered 95,459—116,450—and 119,135, owned by said Company. All Gas-Light Companies are cautioned against the use, without license or authority from the undersigned, of said devices.

The Am. Coal Gas Light Improvement Co.
JOHN H. BLAKE, President.
5 PEMBERTON SQUARE, BOSTON. 41 PINE STREET, N. Y

OHIO GAS CANNEL,
From the Sterling Colliery.

We are now prepared to place in the market, through our agents as below, a regular and unlimited supply of this valuable Cannel, for gas purposes. The analysis made in 1871 by Prof. WURTZ, Editor of this Journal, at the Laboratories of the NEW YORK GAS-LIGHT COMPANY, gave 47½ per cent of Volatile Matter and 45 bushels to the ton of a fair quality of coke. The yield of gas was at the rate of 9,500 feet per ton of about 27 candle power. It is not highly sulphurous, can be purified by Lime, and the ash from the coke does not clinker. The above test has been fully substantiated as correct, and can confidently recommend trial of the coal.

TUTTLE & GIRTY Proprietors,
Cleveland, Ohio.

GENERAL AGENTS.

Geo. Merryweather, & Co., 111 Broadway.

GEO. STACEY. HENRY RANSHAW. WM. STACEY.

GEO. STACEY & CO.,

MANUFACTURERS OF SINGLE AND TELESCOPIC

GAS-HOLDERS,

AND ALL KINDS OF

Cast and Wrought Iron Work

Used in the Erection of Gas and Coal Oil Works.

Foundry on MILL STREET; Nos. 33, 35, 37 and 39.
Office and Wrought Iron Works on RAMSAY STREET Cincinnati, Ohio.

REFERENCE.

Cincinnati Gas-Light Co.	Baton Rouge, La., Gas Co.
Indianopolis Gas Co.	Saginaw, Mich., Gas Co.
Dayton, O., Gaslight Co.	Oshkosh, Wis., Gas Co.
Covington, Ky., Gas Co.	Peoria, Ill., Gas Co.
Springfield, O., Gas Co.	Quincy, Ill., Gas Co.
Terre Haute, Ind., Gas Co.	Champaign, Ills., Gas Co.
Madison, Ind., Gas Co.	Carlinville, Ill., Gas Co.
Kansas City, Mo., Gas Co.	Bowling Green, Ky., Gas Co
Topeka, Kansas, Gas Co.	Hamilton, Ohio, Gas Co.
Burlington, Iowa, Gas Co.	Vicksburg, Miss., Gas Co.
Nashville, Tenn., Gas Co.	Denver City, Cal., Gas Co.

R. T. Coverdale, Eng'r Cincinnati, and others.

JESSE W STARR & SONS,

Camden Iron Works

Camden, New Jersey,

MANUFACTURERS OF

ALL KINDS OF CASTINGS AND APPARATUS FOR GAS WORKS,

Wrought Iron Roof Frames,

For Retort and other houses. Retorts and all castings required for setting them in the latest and most improved model. WASHERS, CONDENSERS, SCRUBBERS and EXHAUSTERS for relieving the Retorts from pressure. PURIFIERS, varying from 2,000 to 2,000,000 cubic feet daily purifying capacity.

Wrought Iron Lime Sieves,

for Purifiers. Station Meters of all sizes.

GAS HOLDERS,

TELESCOPIC AND SINGLE,

With cast iron guide and suspension frames. GAS GOVERNORS or REGULATORS, STREET MAINS, from 1½ to 48 INCHES DIAMETER, for WATER or GAS. Street Main connections, such as BRANCHES, BENDS, DRIPS, SIEVES, etc.

STOP VALVES, from 3 to 30 inches, for both Water and Gas.

Wrought Iron Work.

All the Smith and Sheet Iron work required in and about Gas Works. 226-tf

JESSE W. STARR. BENJ. A. STARR. BENJ. F. ARCHER.

SPECIAL NOTICE.

PARTIES WRITING TO THE UNDERSIGNED ON GAS Matters, will please address J. B. CHICHESTER Engineer, Bayonne and Greenville Gas-Light 303-6m Bergen Point N.

KEYSTONE IRON WORKS,

2132 FILBERT STREET, Philadelphia,

G. W. KRAFT, Proprietor,

MANUFACTURES

GASOMETERS.

COAL CARS, PURIFYING BOXES, COKE BARROWS.

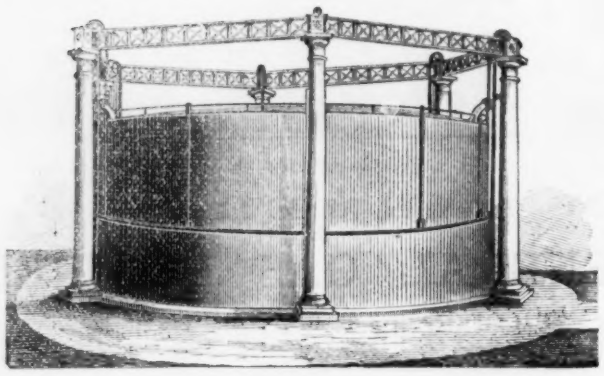

RETORT HOUSE ROOFS, WATER TANKS.

Wrought Iron Work for Bridges, Buildings, Steam Boilers, Tanks, Stills, &c.

Particular Attention paid to Alterations and Repairs.

PROVIDENCE

Steam & Gas Pipe Co.,

PROVIDENCE, R. I.,

BUILDERS OF

Coal and Rosin Gas Works,

FOR TOWNS AND MANUFACTORIES.

Estimates furnished of the cost of Works, and cost to Manufacture Gas in any Locality.

Gasholders,

Iron Truss Retort House Roofs,

Water Tanks,

Purifier Covers,

Coke Barrows,

Cast Iron Socket Pipe.

Particular attention given to Enlarging and Re-building Gas Works.

For Lighting Manufactories, our Rosin Gas Works have been successfully used for *many years* past. They require but small outlay, and afford a *safe* and *economical* light.

FOR SALE AT MANUFACTURERS PRICES:

EXHAUSTERS AND COMPENSATORS,
IRON AND CLAY RETORTS,
FIRE BRICK, CLAY AND TILE,
ROMAN CEMENT AND ROSIN,
STATION AND CONSUMERS' METERS.

REFER TO

Manufacturers' Gas Co., Fall River, Mass.; Youngstown Ohio, Gas Co.; New Rochelle, N. Y., Gas Co.; Homer and Cortland, N. Y. Gas Co.; Danbury, Conn., Gas Co.; North Bridgewater, Mass., Gas Co.; Cold Spring, N. Y., Gas Co., Rockville, Conn., Gas Co.; Taunton, Mass., Gas Co.; Pawtucket, R. I., Gas Co.

FREDERICK GRINNELL, President, J. C. HARTSHORN, Treas,
S. MILLETT THOMPSON, Secretary.

Office and Manufactory, corner of Pine and Eddy Streets, ovidence, Rhode Island.

Office in Syracuse, N. Y., No. 1 Granger Block.

H. A. BRANCH, Agent.

MITCHELL, VANCE & CO.,

Manufacturers of

CHANDELIERS!

And Every Description of

GAS FIXTURES,

Also Manufacturers of

Fine Gilt Bronze and Marble Clocks, warranted best Timekeepers, Mantle Ornaments, &c.

Salesroom, 597 BROADWAY,

Rear Entrance 140 Mercer Street,) NEW YORK.

Special designs furnished for Gas Fixtures for Churches ic Halls Lodges, &c.

P. P. DEILY, J. FOWLER.

1842. *1873.*

DEILY & FOWLER,

39 LAUREL STREET, PHILADELPHIA, PA.,

Builders of Gas Works.

MANUFACTURERS OF

GAS-HOLDERS,

Single and Telescopic.

WROUGHT IRON ROOF FRAMES,

COAL WAGONS,

COKE BARROWS,

AND ALL

Wrought Iron Work

CONNECTED WITH GAS WORKS.

☞ Particulur attention paid to Extensions and Repairs.

GLOUCESTER IRON WORKS.

GLOUCESTER CITY, NEW JERSEY.

DAVID S. BROWN, Pres't. JAMES P. MICHELLON, Sec'y.
BENJ. CHEW, Treas. WILLIAM SEXTON, Sup't.

OFFICE, PHILADELPHIA,

No. 6 North Seventh St., (west side.)

CAST IRON GAS AND WATER PIPE

PIPE CAST VERTICAL.

1½ to 48 inches diameter.

Cast Iron Flange Heating and Steam Pipe.

STOP VALVES FOR WATER OR GAS, ALL SIZES.

Fire Hydrants,

GAS HOLDERS,

TELESCOPIC OR SINGLE.

☞ Castings and Wrought Iron Work of all kinds for Gas Works. 253-6m

BUTLER'S PATENT Coke and Coal

SCREENING SHOVELS.

MADE FROM BEST MALLEABLE IRON AND STEEL.

FURNISHED WITH LONG OR D HANDLES

Perfect in their operation, a very strong, and from their great durability vastly more economical than any substitute. Refer to all the principal gas Companies in the country, who acknowledge them as the "ne plus ultra of Coke Screening Shovels.

Orders addressed only to

O. R. BUTLER,
Sole Agent.
No. 96 Maiden Lane, N. Y.

CAUTION.

Gas Companies, and all parties using Screening Shovels are cautioned against the purchasing (or manufacturing) of any other than myself, or my agents, COKE SCREENING SHOVELS, made either in whole, or in part, of **Malleable Iron,** as such is decided to be an infringement of Butler's Patent of June 4, 1872. O. R. BUTLER,
96 Maiden Lane, N. Y.

OFFICE OF

THE GAS-LIGHT CO. OF AMERICA.

C. K. GARRISON, President.
E. W. McGINNIS, Secretary and Treasurer.
JOHN P. KENNEDY, Chief Engineer.
LEONARD D. GALE, Consulting Chemist.

GENTLEMEN: We beg leave to inform you, that we have purchased the Patent process for making ILLUMINATING GAS from PETROLEUM and its products, known as the

Gale and Rand Patents,

and we are now prepared to treat with you for the use of said process by your Company.

We are also prepared to contract for putting said process into successful operation in your works, furnishing all the necessary plans, materials, and workmen for that purpose.

We do not deem it necessary to enter upon a detailed description, here, of the processes above referred to, deeming it sufficient to state, to secure your interest and investigation, that they have been in successful operation, for months, in a number of Gas-Light Works in the United States, and are now being introduced in the works of the Mutual Gas-Light Company, of New York City; the Citizens' Gas-Light Company, of Brooklyn; the New Orleans, San Francisco, and very many other Gas-Light Companies throughout the country.

For full particulars, address

THE GAS-LIGHT CO. OF AMERICA.

248-tf] **P. O. Box 5220, New York City.**

THE DESPARD COAL COMPANY

OFFER THEIR SUPERIOR

DESPARD COAL

To Gas Light Companies throughout the country.
Agents, PARMELEE BROTHERS, No. 32 Pine street, N. Y
BANGS & HORTON, No. 31 Duane street, Boston.
Mines in Harrison County, West Virginia.
Wharves Locust Point, } Baltimore.
Company's Office, 29 South street, }

Among the consumers of Despard Coal, we name: Manhattan Gas Light Company, New York; Metropolitan Gas Light Company, New York; Jersey City Gas Light Company, N. J.; Washington Gas Light Company; Portland Gas Light Company, Maine.

*** Reference to them is requested 204-1y

THE NATIONAL OIL JOURNAL

CONTAINS

INFORMATION CONCERNING THE PRODUCTION, MANUFACTURE AND USE OF ALL KINDS OF OIL.

EVERY ONE INTERESTED IN OIL SHOULD TAKE IT.

Subscription—One Dollar.

Sample Copies Ten Cents.

NATIONAL OIL JOURNAL COMPANY,
PITTSBURGH, PA

EVENS & HOWARD,

Manufacturers of a superior quality of

Fire-Brick, Clay Gas Retorts,

Gas Tile, Drain Pipe, Fine Ground Fire Clay, &c.

916 Market Street, St. Louis, Mo.

313-3m

Bird, Perkins & Job,

IMPORTERS OF

GAS COAL,

From **Port Caledonia, Glace Bay, Lingan, Cow Bay, Pictou, and Sydney.**

AGENT FOR

WESTMORELAND COAL CO.
CANNELTON COAL CO.
RED BANK MINING CO.

Special attention given to executing orders for **Gas Coal** for shipment to the WEST INDIES and other foreign markets.

27 SOUTH ST., N. Y. 103 STATE ST., Boston. [24

NATIONAL FOUNDRY

AND PIPE WORKS.

OFFICE AND WORKS—CARROLL, PIKE, SMALLMAN AND WILKINS STREETS,

PITTSBURGH, PA

WM. SMITH.

Manufacturer of all kinds of GAS and WATER PIPE BRANCHES, CONNECTIONS, T's, ELBOWS, and all CASTINGS USED AT GAS AND WATER WORKS,

We offer special inducements to parties wishing to purchase. My Pipe is Smooth, regular in weights, and cast vertically.

N. B.—Pipe from 3-inch and upwards, cast in 12-ft. lengths.

☞SEND FOR CIRCULAR AND PRICE LIST.☜

TYRCONNELL GAS COAL.,

MINED IN TAYLOR COUNTY, WEST VA.

Company's Office, 52 S. Gay St., Baltimore.

CHARLES MACKALL, Secretary.

CHARLES W. HAYS, Agent, Room 7, 111 B'way, N. Y.

SHIPPING POINT—Baltimore, Md.

This coal yields 10,000 cubic feet of Gas, with an illuminating power of over 16 candles. Forty bushels of very superior Coke, with little Ash, and scarcely any clinker. 304-1y

NEWARK GAS BURNER MAN'G CO.

Manufacturers of all the

NEW AND IMPROVED

BRASS GAS BURNERS.

The *best* Gas Burners in the World for Street Lamps; also for Portable Gas Machines, to order.

42 Mechanic Street, Newark, N. J.

J. H. JUDKINS, Pres't. H. G. AVERY, Sec'y.

37-3m

JOURNAL OF THE FRANKLIN INSTITUTE.

EDITOR—PROF. W. H. WAHL, PH.D.

ASSISTED BY THE COMMITTEE ON PUBLICATIONS.

This Journal, devoted to Mechanical and Physical Science Civil Engineering, and the Arts and Manufactures, published in monthly numbers of seventy-two pages each, forming two volumes per annum, illustrated with engravings and woodcuts.

The Journal is now in its forty-fifth year of publication, and has become a standard work of reference.

TERMS OF SUBSCRIPTION.—Five dollars per annum; payable on the issue of the sixth number. When the full subscription (five dollars) is paid in advance, the numbers will be sent *free of postage*

Communications and letters on business must be directed to the ACTUARY OF THE FRANKLIN INSTITUTE, PHILADELPHIA

T. F. ROWLAND,

Continental Works,

GREENPOINT, BROOKLYN, N. Y.

ENGINEER, AND MANUFACTURERS OF

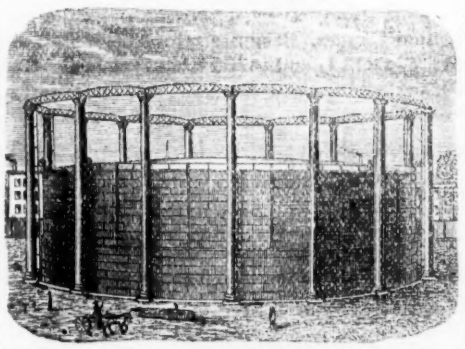

GAS-HOLDERS

OF ANY MAGNITUDE,

Condensers, Scrubbers, Purifiers, Retorts, Hydraulic Mains, and all other articles connected with the Manufacture and Distribution of Gas, furnished with despatch. Plans and Specifications prepared, and Proposals given for the necessary Plans for Lighting Cities, Towns, Mansions, and Manufactories.

B. S. BENSON & SON,

No. 112 BROADWAY, N. Y., ROOM 1.

MANUFACTURERS OF

CAST IRON GAS & WATER PIPE,

And Fittings for Gas & Water Mains, &c.

All sizes from 3 to 30 inches, cast vertically, in lengths of 12½ feet.

SCHOOL OF MINES,

COLUMBIA COLLEGE,

EAST 49th STREET, NEW YORK.

FACULTY:

F. A. P. BARNARD, S.T.D., LL.D., President.
T. EGLESTON, Jr., E.M., Mineralogy and Metallurgy.
FRANCIS L. VINTON, E.M., Mining Engineer.
C. F. CHANDLER, Ph. D., Analytical and Applied Chemistry.
JOHN TORREY, M.D., LL.D., Botany.
CHARLES A. JOY, Ph.D., General Chemistry.
WILLIAM G. PECK, LL.D., Mechanics.
JOHN H. VAN AMRINGE, A.M., Mathematics.
OGDEN N. ROOD, A.M., Physics.
JOHN S. NEWBERRY, M.D., Geology and Palæontology.

The plan of this School embraces a three years' course for the degree of Engineer of Mines, or Bachelor of Philosophy.

For admission, candidates for a degree must pass an examination in arithmetic, algebra, geometry and plain trigonometry. Persons not candidates for degrees are admitted without examination, and may pursue any or all of the subjects taught. For further information and for catalogue, apply to

DR. C. F. CHANDLER,
Dean of the Faculty.

252-1y

THE NEWBURGH Orrel Coal Company,

Mines at Newburg, Preston County, W. Va.

Company's Office, No. 52 S. Gay Street, Baltimore, Md.

C. OLIVER O'DONNELL, Pres't. CHAS. MACKALL, Sec'y.

CHAS. W. HAYS, Agent in New York, Room 7, Trinity Building, 111 Broadway.

SINCLAIR & AGNEW, Agents, Alexandria, Va.

This Company offer their very superior Gas Coal at lowest market prices.

It yields 10,996 cubic feet of gas to the ton of 2,240 lbs. of good illuminating power, and of remarkable purity; one bushel of lime purifying 6,792 cubic feet, with a large amount of coke of good quality.

It has been for many years very extensively used by various Gas Companies in the United States, and we beg to refer to the Manhattan, Metropolitan, and New York Gas Light Companies of New York; the Brooklyn and Citizen's Gas Light Companies of Brooklyn, N. Y.; the Baltimore Gas Light Company of Baltimore, Md., and the Providence Gas Light Company, Providence, R. I.

The best dry coals shipped, and the promptest attention given to orders. 224-1y.

PLYMOUTH IRON WORKS.

MANUFACTURERS OF

Cast Iron Gas and Water Pipe,

FROM TWO INCHES TO SIX FEET DIAMETER

HENRY G. NICHOLS,

SELLING AGENT.

14 PLATT STREET, N. Y. 291-6m

LUDLOW Valve Manf'g Co.,

OFFICE AND WORKS

938 to 954 River Street and 67 to 83 Vail Ave.,

TROY, NEW YORK.

Make Valves (Double and Single Gate ⅜ inch to 36 inch—outside and inside screws, Indicator etc.) for Gas, Water and Steam—also

HYDRANTS.

We would refer to the following among many other Companies using them:

GAS-LIGHT COMPANIES.

Metropolitan, New York; Manhattan, N. Y.; Buffalo, N. Y.; Brooklyn, N. Y. Rochester, N. Y.; Philadelphia, Pa. New Orleans, La.; Cincinnati, Ohio; Cleveland, Ohio; Columbus, Ohio Chicago, Ill.: Quincy, Ill.; Springfield Mass.; Milwaukee, Wis.; St. Louis Mo.; Louisville, Ky.; Memphis, Tenn. Galveston, Texas.

WATER COMPANIES.

Burlington, Vt.; Keene, N. H.; Concord, N. H.; Springfield, Mass; Worcester, Mass.; Buffalo, N. Y.; Auburn, N. Y.; Utica, N. Y.; Troy, N. Y.; Philadelphia, Pa.; Cincinnati Ohio, Cleveland, Ohio; Dayton, Ohio; Peoria, Ill.; Detroit, Mich.; St. Paul. Minn.; New Orleans, La.; Memphis, Tenn.

C. CEFRORER,

Manufacturer of

GAS BURNERS,

GAS HEATING AND COOKING APPARATUS,

FITTERS' PROVING APPARATUS. ETC.,

No. 248 North Eighth Street, Philadelphia.

MURRAY & BAKER,

Practical Builders,

And Contractors for the Erection of Gas Works,

MANUFACTURERS OF ALL THE LATEST AND MOST IMPROVED APPARATUS AND TOOLS FOR THE MANUFACTURE & DISTRIBUTION OF COAL GAS.

☞ WORKS AT THE RAILWAY DEPOTS,

FORT WAYNE, INDIANA.

We manufacture Bench Castings, Washers, "The Immersed Multitubular," and Atmospheric Condensers, Wet and Dry-Lime Purifiers, Dry Center Seals, Telescopic and Single Gas Holders, Wrought Iron Trussed Roof for Iron or Slate, Wood and Iron Trays for Purifiers, Coke and Coal Carts, Wrought Iron Screening Shovels and Castings, and Wrought Work of every description for Gas-Works.

As Mr. Murray is a Practical Draughtsman, we will furnish plans and specifications to parties or associations, or will wait personally upon parties contemplating the construction of new works, or the alteration or extension of old ones

The most satisfactory references can be given, if required, of the experience and commercial fairness which characterizes our dealings.

We would respectfully invite Western mento call and see our patterns and works here. MURRAY & BAKER,

198-1y Fort Wayne, Indiana.

SAMUEL DOWN, President.
H. CARTWRIGHT, Vice-President.

THOMAS J. EARLE, Secretary.
T. C. HOPPER, General Superintendent.

AMERICAN METER COMPANY,

MANUFACTURERS OF

Wet and Dry Gas Meters (with Slide or Rotary Valves), Station Meters, Dry Centre Valves, Pressure Registers, Pressure and Vacuum Registers, Meter Provers, King's Pressure and Vacuum Gauges, Exhauster Governors, Experimental Meters, Watchman's Clocks, Etc., Etc.

☞ Sole Agents for W. SUGG'S **PHOTOMETRICAL** and **ANALYTICAL GAS APPARATUS.**

A full assortment of the above kept at the Manufactories and Agencies, where orders may be addressed,

Agencies.

S. E. Corner Fourth Street and Central Avenue, Cincinnati.
32 West Washington Street Chicago.
511 Olive Street, St. Louis.

American Meter Company,

512 West Twenty-sceond Street, New York.
Arch and Twenty-second Street, Philadelphia.
324 Washington Street, Boston.

HARRIS & BROTHER,

ESTABLISHED 1848.

PRACTICAL GAS METER MANUFACTURERS,

Continue as heretofore at the OLD ESTABLISHMENT, Nos. 1115 and 1117 Cherry Street, Philadelphia, Pa.,

To manufacture Wet and Dry Gas Meters, Station Meters, Experimental Meters, Meter Provers, Centre Seals, Governors, Pressure Registers, Indicators, Photometers, and all kinds of Gas Apparatus; Also furnish all other Articles appertaining to the use of Gas Works.

From our long Practical Experience of the Business (covering a period of 20 years) and from our personal supervision of all Work, we can guarantee all orders to be executed promptly, and in every respect satisfactorily.

J. Wesley Harris, Washington Harris, William Helme.

WILLIAM W. GOODWIN & CO.

No. 1012, 1014 and 1016 Filbert Street,

Philadelphia, Penn'a.

MANUFACTURERS OF

Dry and Wet GAS METERS, Station Meters (Square, Cylindrical or in Staves), Glazed Meters, King's and Sugg's Experimental Meters, Lamp Post Meters, Etc., Etc., Meter Provers (sizes 2, 5 and 10 feet), Pressure Guages of all kinds, Pressure Registers, Pressure and Vacuum Registers, Pressure Indicators (sizes 4 inch, 6 inch and 9 inch), King's Pressure and Vacuum Gauges, Dry and Wet Centre Seals, Dry and Wet Governors, Exhauster Governors, Photometers of all descriptions. Letheby's Sulphur and Ammonia Test Apparatus complete—also Testing and Chemical Apparatus of all kinds, and of the most perfect description, for all purposes relating to Gas.

Goodwin's Improved Lowe's Jet Photometer.

W. W. Goodwin is the author of the History and Principles involved in the use of Lowe's Jet Photometer. Also Patentee and we are the SOLE MANUFACTURERS of the ORIGINAL and ONLY DIAL whereby the CANDLE POWER and PRESSURE can be instantly read, and all others are infringements.

Special attention to repairs of Meters, and all apparatus connected with the business.

All work guaranteed first class in every particular, and orders filled promptly.

WILLIAM WALLACE GOODWIN. [335 1y] HOWARD KIRK, Special Partner.

BALTIMORE RETORT AND FIRE BRICK WORKS.

GEO. C. HICKS & CO.

CLAY RETORTS FOR GAS WORKS AND SUGAR REFINERIES.

TILES AND BLOCKS OF ALL KINDS.

FIRE BRICK.

FIRE MORTAR, CLAY AND SAND.

ALL KINDS OF FIRE CLAY MATERIALS.

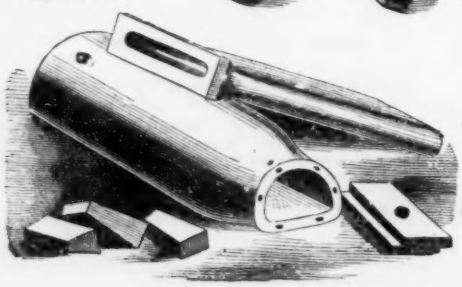

The Only XX Fire Brick.

☞ RETORTS OF THE VARIOUS SIZES KEPT ON HAND.



Vitrified Steam Pressed Drain and Sewer Pipe.

1849. HARRIS, GRIFFIN & CO., 1873.

12th and Brown Streets, Philadelphia, Penna.

and 49 DEY STREET, NEW YORK CITY.

Manufacturers of WET AND DRY GAS METERS, STATION METERS, SHOW AND TEST METERS, METER PROVERS, PRESSURE REGISTERS AND INDICATORS, BAR AND JET PHOTOMETERS, WET AND DRY CENTER VALVES, and all Apparatus pertaining to Gas Works in their line.

Patentee and Sole Manufacturer of the ORIGINAL and ONLY CORRECT GAS EXHAUST GOVERNOR.

We hereby caution all parties against making, vending, or using any GAS EXHAUST GOVERNOR that will be an encroachment of our patent.

The support and confidence of Gas Companies, so long enjoyed by us, encourage us to pursue the same undeviating course that has contributed to establish the character of our house, and with our extended experience and increased facilities, develop the latest improvement that Science can apply, in the construction of Gas Meters, etc., and thereby merit a continuance of the favors hitherto so liberally extended to us, always guaranteeing satisfaction.

ANDREW HARRIS. JOHN J. GRIFFIN.

J. L. Cheesman,

MANUFACTURER OF

Patent Conically and Diamond Slotted Solid Wood Trays.





To Gas Companies.

The above Trays will last longer. and are cheaper than any Tray now used. They are now made without any outside strips, which gives more purifying surface, being perfectly smooth. The lime will not adhere to them as in other Trays. They are now used in over three hundred Gas Companies in he United States, and other places.

JOHN L. CHEESMAN,
151 and 153 Avenue C, New York.

R. D. WOOD & CO.,

PHILADELPHIA.

MANUFACTURERS OF

CAST IRON GAS & WATER PIPES, Matthews Patent Hydrants, Lamp Posts, Etc.



For the accommodation of parties who may want small lots Pipe for *immediate* delivery, we have established a yard in New York City.

We have on hand here several thousand feet of small Pipe. from which we can ship orders readily to any part of the country.

R. PAINE, Selling Agent,
No. 173 Broadway, New York,
3-tf SECOND FLOOR.

NORTHWESTERN
GAS AND WATER PIPE COMPANY.

WORKS, AT BAY CITY, MICHIGAN.

CHICAGO OFFICE, 646 WABASH AVENUE.

SECTION OF GAS PIPE.





FIG. 2.



FIG. 3.

A—Cylinder of Wood. B—Band of Iron. C—Coating of Hydraulic or Asphaltum Cement.

FIG. 2.—Thimble for Connection. FIG. 3.—Horizontal Section and Connection.

Above is a cut of the

"WYCKOFF PATENT IMPERISHABLE GAS PIPE,"

manufactured by the NORTHWESTERN GAS AND WATER PIPE COMPANY.

This Pipe is made of White Pine, one inch to sixteen inches bore, in sections eight feet long rounded in a lathe, coated inside and out with Asphaltum, connected with a tenon, or socket, and a thimble joint, perfectly air and water tight, being driven together with cement furnished by the Company. When laid its cost is about one half that of Iron Pipe, and is UNQUESTIONABLY the best Gas conducting Main in use.

☞ Send for Descriptive Pamphlet and Price List. 242-1y

S. FULTON & CO.,

PLYMOUTH IRON WORKS,

CONSHOCKEN, PA.,

Manufacturers of

PIG IRON & CAST IRON GAS & WATER PIPES.

Also, Heavy and Light Castings of every description.
412 Walnut street, Philadelphia, Pa.

SAMUEL FULTON, THEO. TREWENDT

RILEY A. BRICK & CO.,

MANUFACTURERS OF

CAST IRON PIPES,

FOR WATER AND GAS,

ALSO,

GAS WORKS AND MACHINERY CASTINGS

OF EVERY DESCRIPTION,

No. 112 Leonard Street, New York.

RILEY A. BRICK. JAS L. ROBERTSON

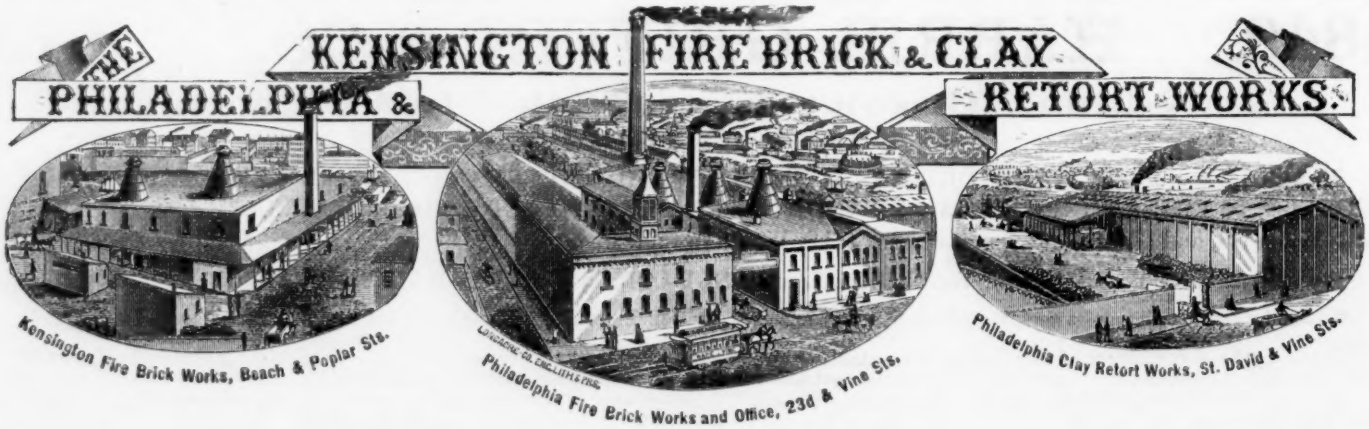
THE
PHILADELPHIA &
KENSINGTON FIRE BRICK & CLAY
RETORT WORKS.
Kensington Fire Brick Works, Beach & Poplar Sts.
Philadelphia Fire Brick Works and Office, 23d & Vine Sts.
Philadelphia Clay Retort Works, St. David & Vine Sts.

PHILIP NEUKUMET,

(SUCCESSOR TO JOHN NEUKUMET),

Manufacturer of Fire Bricks, Tiles, Gas and Sugar House Retorts.

☞ Plans of Settings for Benches of Threes, Fives, and Sixes furnished, free of charge, upon application.

WILSON & GARDNER.

Works, Lockport, Westmoreland Co., Pa.

Office, 96½ Fourth Avenue, Pittsburgh, Pa., Rooms 1 and 2.

MANUFACTURERS OF

CLAY RETORTS, FIRE BRICK, TILE, Etc.

FROM CLAY, SAME SPECIES, AND EQUAL TO

BEST BELGIAN.

☞ ORDERS PROMPTLY FILLED. IMPROVED WORKING PLANS OF THREES AND FIVES UPON APPLICATION.

REFERENCES

Gas Works Northwest, West, and South.

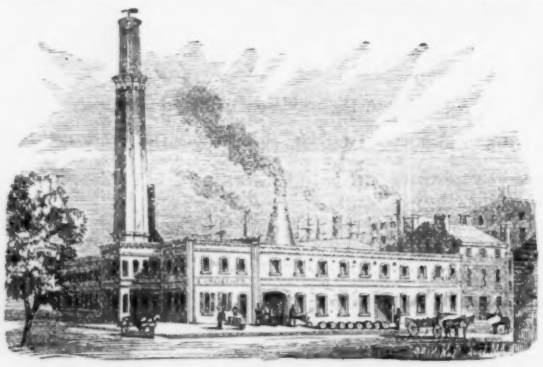

NEW YORK

FIRE BRICK AND CLAY

Retort Works.

☞ *Established in* 1845. ☜

(Branch works at Kreischerville, Staten Island.)

B. KREISCHER & SON,

OFFICE,

58 Goerck Street, cor. Delancy, N. Y.

GAS RETORTS, TILES & FIRE BRICK

Of all shapes and sizes.

FIRE MORTAR, CLAY AND SAND.

Articles of every description made to order at the hortest notice.

B. KREISCHER & SON.

MANHATTAN

FIRE BRICK & ENAMELLED CLAY

Retort Works.

MAURER & WEBER,

(Of the late firm of B. Kreischer & Co.,)

PROPRIETORS.

Office and Works, 15th Street, Avenue C.

Manufactures of

FIRE BRICK AND TILES,

Of all shapes and sizes.

FIRE MORTAR, CLAY AND SAND.

☞ Articles of every description made to order at short notice. (135

HY. MAURER. ADAM WEBER.

CRAHAMITE,

OR

RITCHIE MINERAL.

The yield of this Asphalt is nearly double, and the Candle Power more than double the product of Gas Coals, and it is extensively used by great and small companies, chiefly as an enricher and stimulant, in the proportion of five per cent. Yield 15,000 to 16,000 feet per gross ton. Illuminating power 30 to 32 candles. One bushel of lime purifies 6000 feet. Coke very strong. It is incapable of spontaneous combustion or caking in the heap, and is used by simple addition to the charge.

We sell at figures which allow a much larger profit to the purchaser, with better light than any standard coal.

No gas material is at once so safe and so cheap. Our Asphalt is used in the manufacture of Varnish, Roofing, Ship Paint, Tiles, Pavements, Water Proof Paper, Cloth, and for all purposes where a coating is required that is unaffected by Water, Gasses, Alkalies, or Acids.

The Ritchie Mineral Resin and Oil Co.

252 No 27 South Charles St., Baltimore, Md.

JERSEY CITY

GAS METER WORKS.

R. M. POTTER & CO.,

MANUFACTURERS OF

CONSUMERS GAS METERS, WET AND DRY,

Station Meters, Center Seals, Governors, Pressure Registers,

AND ALL KINDS OF PRESSURE GAUGES.

Experimental Meters and Standard Test Gasholders,

☞ And all apparatus in use at the Gas Works ☜

14 Morris St., Jersey City, N. J. (1y

LACLEDE FIRE BRICK

AND

Clay Retort Works,

Cheltenham, St. Louis Co., Mo.

Laclede Fire Brick Manufacturing Co.

Office, 901 Pine Street. Warehouse, 1007 N. Levee, St. Louis

NOW READY AND FOR SALE,

FODELL'S

System of Bookkeeping

FOR GAS COMPANIES.

Price $5, which should be sent either in Check, P. O. Order, or Registered Letter.

Blank Books, with printed headings and forms on this system, will be supplied to Gas Companies, by applying to W. P FODELL, Philadelphia, or

A. M. CALLENDER & Co.,

Office GAS-LIGHT JOURNAL, 42 Pine St., N.Y.

GAYLORD IRON AND PIPE COMPANY.

Office, 90 and 92 Broadway, Cincinnati, Ohio.

Works, Newport, Ky.

T. G. GAYLORD, President. S. B. BROWN, Superintendent. C. B. FOOTE, Secretary and Treasurer.

H. G. H. TARR, Department of Sales and Contracts.

MANUFACTURERS OF

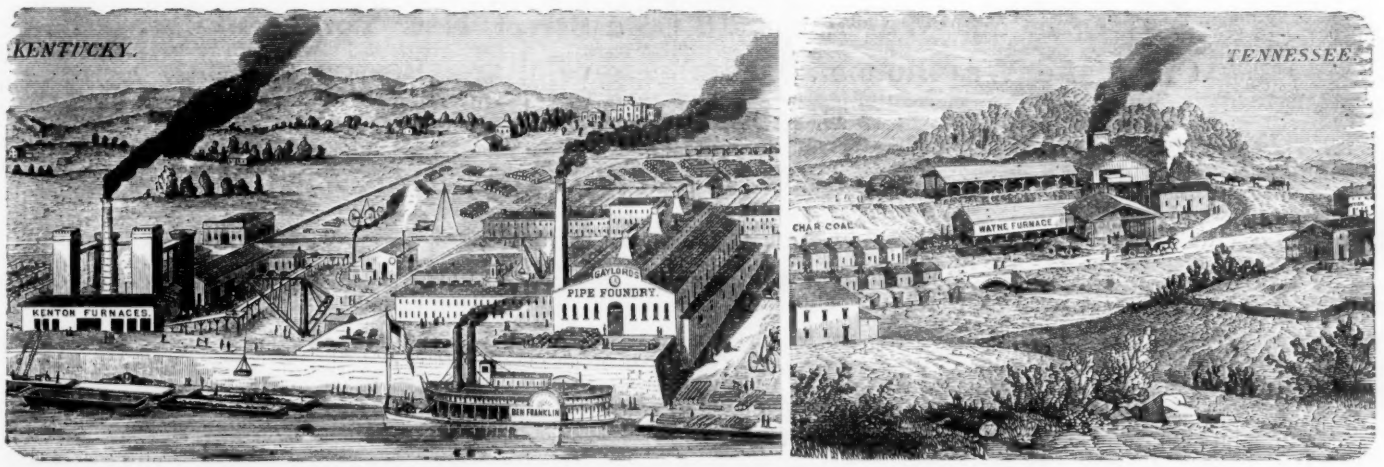

CAST IRON GAS AND WATER PIPE.

And all forms of Special Castings for Gas and Water Works.

PIPE—2, 3, 4, 5, 6, 8, 10, 12, 14, 15, 16 to 60 inches 3 inches and above Cast in Dry Sand in 12 feet Lengths.

FLANGE, STEAM and HEATING PIPE.

Our KENTON FURNACE gives us a fine quality of Stone Coal Iron; this with our Tennessee Charcoal Iron, which we retain for our Foundry use, enables us, by controlling our Iron, to turn out Castings of a uniform and superior quality, and at a cost advantageous to our Customers.

Exclusive Manufacturers of the **ROBBINS JOINT** for Street Mains. The Superintendent of the Indianapolis Gas Company (and many others) say of this Joint: "Its superiority consists of facility in laying, economy in time and lead, and above all, its perfection as a joint.

Estimates given for Furnishing and Laying Street Mains with either common or Robbins Joint.

JOHN P. KENNEDY,

SUCCESSOR TO

Hoy, Kennedy & Co.,

GAS ENGINEER AND CONTRACTOR

For the Erection, Alteration and Extension of Gas Works.

PLANS, SPECIFICATIONS AND ESTIMATES.

Office 98 Liberty Street. P. O. Box 2,348

AGENT FOR THE

ATLANTIC DOCK

Iron & Machine Works,

FERRIS, WOLCOTT AND DYKEMAN STREETS,

South Brooklyn.

MANUFACTURERS of every kind of Gas Machinery, Retorts Bench Castings, Wrought Iron Work, Multitubular and Air Condensers, Washers, Scrubbers, Purifiers, Exhausters with every equipment complete for large or small Works, Gasholders, Telescopic or Single; Iron Roof Frames with Cornice Gutters, covered with Corrugated Iron or Slate; Iron Doors and Iron Pivot Blind Windows; Coke Barrows, Fire Tools, Retort Lids, Cotter Bars and Screws, Stop Valves, Tar Valves for Regulating Dip in Hydraulic Mains, Pressure Governors for Street Mains, and Compensators for Exhausters that are unrivalled for unvarying accuracy Steam Engines, Boilers, Etc., Etc.

Post Office Box 2,348. Office 98 Liberty st

WORKS UPON GAS.

BOWDITCH.—THE ANALYSIS, TECHNICAL VALUATION, Purification, and Use of Coal Gas, with illustrations, 8vo. cloth. Price, $4.50.

GAS-LIGHT MANUAL—Being a Treatise on the Management of Coal Gas, as applied to Domestic Purposes, etc. By John Campbell. Paper, 75 cents.

A GUIDE TO GAS-LIGHTING—By Alexandor H. Wood, A. I. C. E.; second edition. Revised and enlarged. 8vo. paper, 50 cents.

LAW OF GAS AND WATER SUPPLY—Comprising the Rights and Duties as well of Local Authorities as of Private Companies in regard therete. By W. H. Michael and J. Shiress Will. 1 vol. crown 8vo. cloth. $9.00.

CLEGG—Treatise on the Manufacture of Coal Gas, 5th edition, enlarged, 4to, cloth. Price, $10.50.

COLBURN—The Gas Works of London, 12mo, boards. Price, 60 cents.

GAS CONSUMERS' GUIDE—A Hand Book of Instruction on the proper management and economical use of gas, etc., etc. 12mo., cloth. Price, $1.00.

HUGHES—Gas Works and Manufacturing Coal Gas, 12mo Price, $1.20.

D'HURCOURT—De l'Eclairage du Gas. Par E. R. Hu court, 3d edition. Paris, 1863; 8vo. and plates, $6.00.

RICHARD—Gas Consumer's Guide, 12mo. Price, 50 cents

SWEET—Special Report on Coal, showing its Distribution, Classification, and Cost, delivered over different routes to various points in the State of New York, and the principal cities on the Atlantic Coast. By S. H. Sweet, with Geological Maps. 1 vol. 8vo. cloth, $3.

MODERN STREET LIGHTING.—By William Sugg. 8vo. paper. 75 cents.

WILKINS—How to Manage Gas; 24mo., paper. Price, 25c

SCHILLING—Traite d'Eclairage par le Gaz. Price, $22.

For sale by

D. VAN NOSTRAND, Publisher,

23 Murray Street and 27 Warren Street (Upstairs).

☞ Our new and revised Catalogue of American and Foreign Scientific Books, 80 p. 8vo., sent to any address, on receipt of ten cents in postage stamps. 289

GEO. A. McILHENNY'S

PATENT

VACUUM PROCESS,

FOR RELIEVING GAS RETORTS FROM PRESSURE.

Patented in the United States and Great Britain, June 1867 first patent for this purpose in the United States (but not presented to the public until fully tested). Now in successfu operation for six years, with most satisfactory results.

The many devices lately brought to the notice of the American public, to accomplish the same results are mostly old English contrivances tried and abandoned years ago, on account of the machinery, stuffing boxes, valves, levers, etc., necessary

But the extraordinary results obtained by the McIlhenny process, have induced some unprincipled persons to bring to the notice of the public, as *recent inventions of their own*, some of these old devices; their purpose seems to be simply to evade the patent.

This process is not only safe, simple and effective, but costs little to apply. The only machinery necessary is a one and a half inch stop cock, and a half inch stop cock to each bench No alteration in the old system is required. In fact, a Works operated with this process, can at any time be operated on the old pressure system, simply by closing the two stop cocks above mentioned. There is nothing to get out of order, nothing that requires special attention; no stuffing-boxes to pack and keep tight, no valves to keep clear of tar and pitch, no levers to lubricate, and no expense for a great amount of machinery.

The McIlhenny process challenges the world as regards yield and quality of gas.

For particulars apply to GEO. A. McILHENNY, Engineer of the Washington Gas-Light Co., Washington, D. C.,.or to WILLIAM YORKE, Engineer of the Portland Gas-Light Co., Portland, Me., who will take pleasure in corresponding with any one interested. 307–1y

GRAHAM'S

Patent Anti-Freezing LAMP POST.



THE BEST, CHEAPEST AND MOST DURABLE POST EVER OFFERED TO THE PUBLIC.

WOOSTER, OHIO
Jan. 24, 1871.

J. W. GRAHAM,

Dear Sir: Yours of the 14th inst at hand. In reply I would say that we have tested the six anti-freezing Lamp Posts purchased from you, and find them to be all as you represented. Whilst nearly a dozen of our sixty-five Posts were frozen down last month and first of this not one of yours was affected by the heavy frost. What can you sell them at?

Yours truly,
LUCAS FLATTERY
Sec'y Wooster Gas-Light Co.

Address the Patentee,

J. W. GRAHAM,
Chillicothe, Ohio.

250-9t

THOMAS T. TASKER JR. STEPHEN P. M. TASKER.

MORRIS, TASKER & CO.,

PASCAL IRON WORKS, PHILADELPHIA.

TASKER IRON WORKS, NEWCASTLE, DEL.

Office, Fifth and Tasker Streets, Philadelphia.

Office and Warehouse, 15 Gold Street, New York.

Office and Warehouse 29 Pemberton Square, Boston, Mass.

Established 1821.

FOR GAS WORKS MACHINERY, ADDRESS OFFICE, FIFTH AND TASKER STREETS, PHILADELPHIA.

Manufacturers and Builders of Gas Works, &c., of all Descriptions, of the Most Approved Plans.

WROUGHT IRON ROOF FRAMES.—For Slate, or Corrugated Iron Coverings, with Cast Iron Cornice Gutter. Iron Doors and Frames, Wrought Iron Pivot Blinds, Windows and all kinds of Castings and Smith Work for Buildings.

BENCH CASTINGS.—Retorts, and all Castings and Wrought Iron Work required for Setting them on the Latest Plan. Tar Gates, Wrought Iron Stand Pipes, Retort Lids, Cotter Bars, Coal and Coke Wagons, and Stokers' Tools.

EXHAUSTERS.—Exhausters and Compensators, By-Passes to pass from 4,000 to 150,000 Cubic feet of Gas per hour, with Engines, Governors, Pressure and Vacuum Guages.

SCRUBBERS.—Single or Multitubular Scrubbers, with Self-Acting Pumps for Ammonia Water.

WASHERS.—Cataract and Single and Multitubular Spray Washers.

CONDENSERS.—Single and Multitubular Air and Water Condensers.

PURIFIERS.—For Purifying from 1,000 to 2,000,000 cubic feet capacity daily, with either wet or dry Lime, or Oxide of Iron, and with either Ash Rivetted or Wrought or Cast Iron Lime Sieves.

CARRIAGES.—Movable Lifting Carriages for Purifiers, arranged either for Floor or Overhead use.

METERS.—Square and Round Meters of any capacity.

GAS HOLDERS.—Single Lift and Telescopic Gasholders, with Cast or Wrought Iron Suspension Frames.

GAS GOVERNORS.—Station Governors, with Regulating and Indicating Columns for Inlet and Outlet Pipes, also Dry Governors with Flexible Diaphragms for Underground Pipes.

STOP VALVES.—Double Faced Stop Valves for Gas or Water, from three inches to forty-eight inches diameter. These Valves are proved on both sides, with a heavy Water Pressure, Flange and Bell Pipes, Fittings and Drips of all descriptions. Steam Boilers and Hot Water Apparatus for Heating Building, and Gas Holder Tanks. Lamp Posts and Lanterns.

P. Munzinger's Patent Ash Lime Trays.

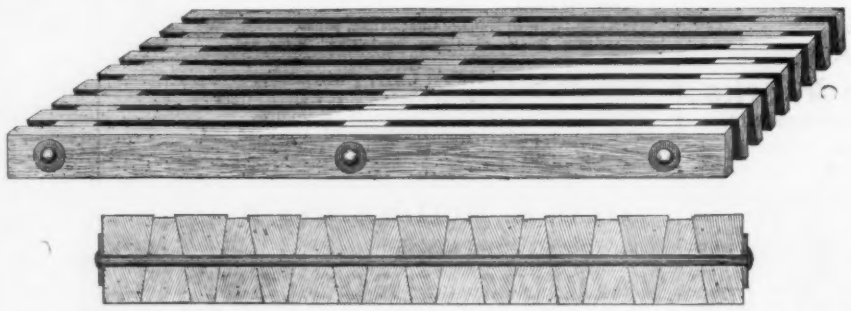

In use at the following Gas-Light Companies:

Pittsburg Gas Company, Pa.
Peoples Gas Company, Baltimore.
Lowell Gas-Light Company, Mass.
Lynn Gas-Light Company, Mass.
Albany Gas-Light Company, N. Y.
Schenectady Gas-Light Company, N. Y.
Utica Gas-Light Comwany, N. Y.
Jersey City Gas Company, N. J.
St. Paul Gas-Light Company, Minn.
Cumberland Gas-Light Company, Md.
Hartford City Gas-Light Company, Conn.
Richmond Gas Company, Va.
McKeesport Gas Company, Pa.
Middletown Gas Company, Pa.
East Newark Gas-Light Company, N. J.
Binghampton Gas Company, N. J.
Zanesville Gas Company, Ohio.

New Orleans Gas Company, La.
Salem Gas-Light Company, Mass.
New Britain Gas-Light Company, Conn.
Rahway Gas-Light Company, N. J.
Trenton Gas-Light Company, N. J.
Elmira Gas Company, New York.
Erie Gas Company, Pa.
Columbus Gas-Light Company, Ohio,
Westchester Gas-Light Company, N. Y.
Santa Cruz Gas Company, Cal.
Lawrence Gas-Light Company, Kansas.
Salem Gas Company, N. J.
Indiana Gas-Light Company, Pa.
Peoria Gas Company, Ill.
Montclair Gas Company, N. J.
Williamsport Gas Company, Pa.
Wooster Gas-Light Company, Ohio.

Augusta Gas-Light Company, Ga.
Huntsville Gas Company, Ga.
Chattanooga Gas Company Tenn.
Murfreesboro Gas Company, Tenn.
Hagerstown Gas-Light Company, Md.
Hanover Gas Company, Pa.
Easton Gas Company, Pa.
Uniontown Gas-Light Company, Pa.
Coatesville Gas-Light Company, Pa.
Houston, Gas Company, Texas.
Wilkesbarre Gas Company, La.
Middletown Gas Company, New York.
Washington Gas-Light Company, Pa.
Princeton Gas-Light Company, N. J.
Newark Gas Company, Ohio.
Pontiac Gas-Light Company, Mich.
And numerous other Companies.